

10-20 kVA GUARDIAN®

Home Standby Generators

Automatic Power Backup

SPECIFICATIONS (LP/NG)	10 kVA	13 kVA	20 kVA
Generator Only Model	FG0070481	FG0070491	FG0072190
Voltage (single Phase)	220 / 230 / 240	220 / 230 / 240	-
Voltage (Three Phase)	-	-	380 / 400 / 415
Amps @240V LPG	45.5	59.1	-
Amps @380V LPG	-	-	30.4
Amps @240V NG	45.5	59.1	-
Amps @380V NG	-	-	25.8
Engine/Alternator RPM	3000 / 3000		
Engine	Generac G-Force		
Engine Displacement	999cc		
Fuel Consumption @ 1/2 Load - NG cu. ft/hr (m/hr)	126 (3.57)	150 (4.25)	152 (4.30)
Fuel Consumption @ Full Load - NG cu. ft/hr (m/hr)	204 (5.78)	231 (6.54)	229 (6.48)
Fuel Consumption @ 1/2 Load - LPG cu. ft/hr (gal/hr) [l/hr]	45 (1.24) [470]	51 (1.40) [5.29]	69 (1.89) [7.16]
Fuel Consumption @ Full Load - LPG cu. ft/hr (gal/hr) [l/hr]	70 (1.91) [7.24]	80 (2.20) [8.32]	107 (2.94) [11.11]
Quiet-Test Mode	Yes		
db(A) at Exercise	55	55	59
db(A) at Normal Operating Load	64	64	65
Enclosure	Aluminum		
Enclosure Color	Bisque		
Warranty	5-Year Limited		
Dimensions - L" x W" x H" in. (mm)	1218 x 638 x 727 (48 x 25 x 29)		
Weight (Kg)	176 (389)	193 (425)	210 (463)
Built-in Mobile Link™	Yes		

REV1/25

PRAMAC GENERAC AUSTRALIA PTY LTD

All right reserved.

1A/184, Milperra Road, NSW, 2212, Revesby Australia


(+61) 2 8106 3100 sales.au@pramac.com @GeneracInternational



10-20 kVA GUARDIAN® SERIES

Home Standby Generators

Automatic Power Backup

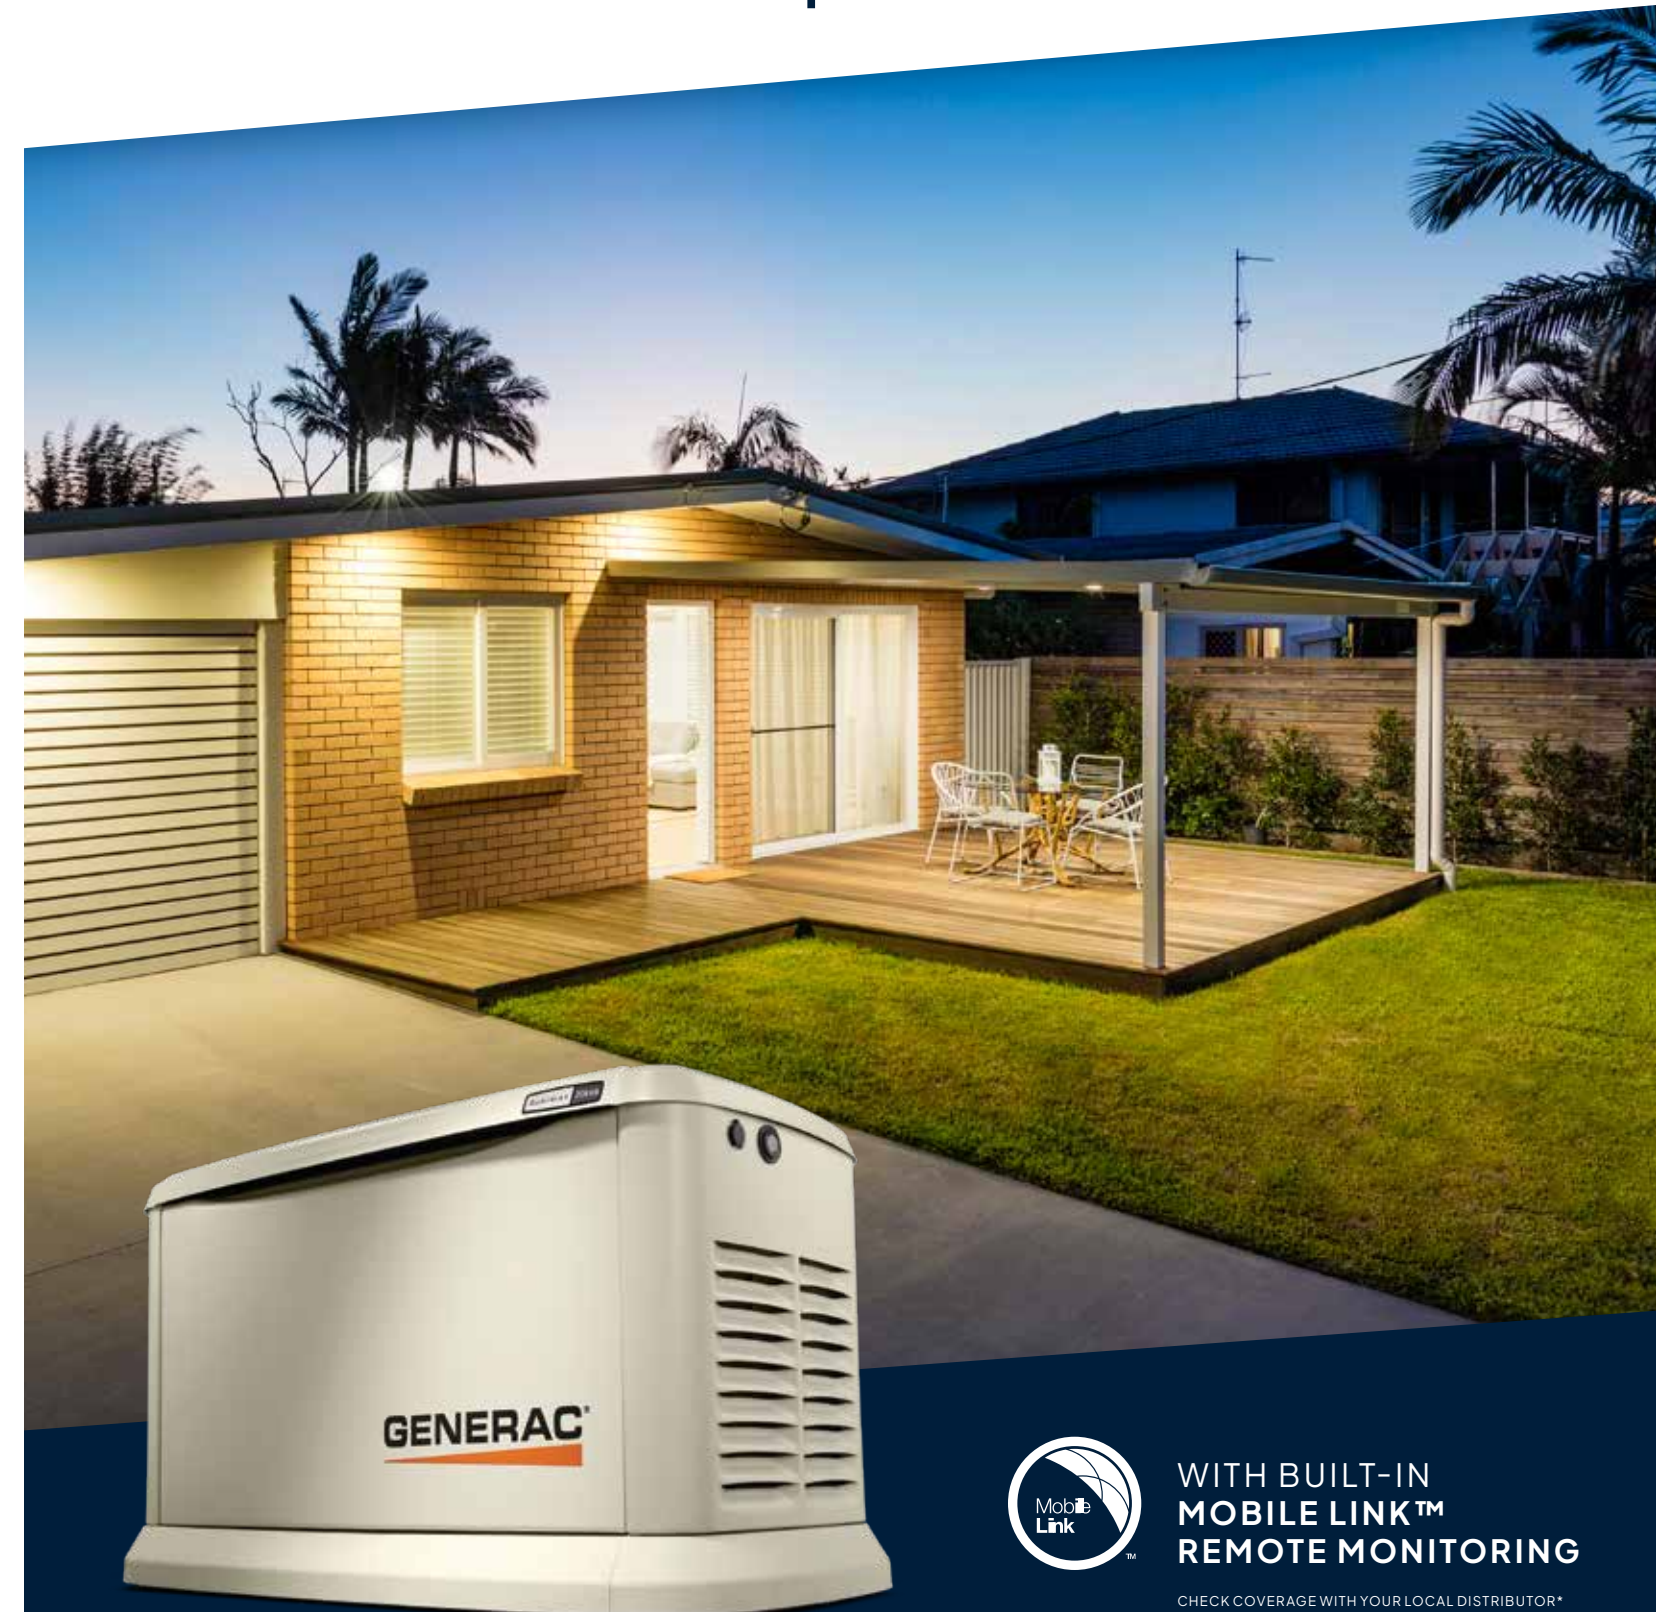

WITH BUILT-IN MOBILE LINK™ REMOTE MONITORING

CHECK COVERAGE WITH YOUR LOCAL DISTRIBUTOR*

Choose the #1 selling home standby generator brand



Generac's Guardian® Series generators help provide the automatic backup power you need to protect your home and family during a power outage. When connected to your home's existing LP or natural gas supply, the generator starts automatically within seconds of detecting a power loss and runs for as long as necessary until utility power is restored. Choose from Generac's industry leading lineup to power just the essentials, or Generac's 20 kVA for whole-house coverage.

Features & Benefits:



GENERAC'S G-FORCE ENGINE

Purpose-built for the rigors of power generation. It also requires fewer scheduled maintenance checkups than some competitor's engine and helps provide the reliability you need for the long run-times that emergency backup can require.



TRUEPOWER™ TECHNOLOGY

Delivers best-in-class power quality with less than 5% total harmonic distortion for clean, smooth operation of sensitive electronics and appliances.



QUIET-TEST™ SELF-TEST MODE

Runs at lower RPM for a five or twelve minute test, is significantly quieter than other brands, and consumes less fuel.



GENERAC'S EVOLUTION™ CONTROLLER

Featuring a dual-line, multilingual LCD display allowing for easy monitoring of history and maintenance logs and manage your generator.



WEATHER-RESISTANT ENCLOSURES

Our RhinoCoat™ powder-coated finish helps aluminum resist corrosion, making it ideal for all weather conditions.



Enjoy peace of mind 24/7 with Mobile Link™. Link™

CHECK COVERAGE WITH YOUR LOCAL DISTRIBUTOR*

Remote monitoring with Mobile Link™ lets you share information about your home standby generator no matter where you are, using a computer, smartphone, or tablet.



Alert

Get real-time notifications from your generator.



Protection

Remotely access your generator's status.



Management

View your generator's maintenance needs.



Also Featuring:



BUILT IN THE USA*

Generac generators and engines are engineered and built in the USA*

*Assembled in the USA using domestic and foreign parts.



5-YEAR LIMITED WARRANTY

Included with all home standby generators.