

HOTO EasyFlow Hot Glue Gun



**Make It
Happen**




Visit our website for more Cool Tools
(www.hototools.com)

01 Product Introduction

Please carefully read this Manual before using the product and keep it properly.

Thanks for using HOTO EasyFlow Hot Glue Gun.

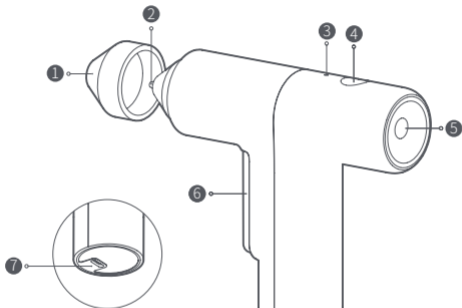

① Gun cover

② Gun nozzle

③ State indicator light

④ On/off button

⑤ Glue inlet

⑥ Glue output button

⑦ Type-C charging port

02 Instructions

This product can be used with 7mm-diameter hot melt glue sticks (HOTO hot melt glue sticks are preferred) to bond plastics, wood, paper products, textiles, ceramics, glass, leather, crystal items, shells, etc.

Power on/off

- In "Off" state, press and hold the "On/off" button for 3 seconds to power on the product.
- In "On" state, press and hold the "On/off" button for 3 seconds to power off the product.
- If the product is let rest for 5 minutes, it will automatically power off.

Usage

- Power on the product, insert a glue stick, wait (for about 30 seconds) until the state indicator light is long on (indicating that preheating is completed), and press the glue output button to output glue.
- Spread the glue to the item to be bonded, and press it until the glue sets. Bonding is thus completed.

Charging

- Charge the product by connecting it to the charger with a Type-C charger cable.
- If the product has been idle for a long time, fully charge it before use.
- Please buy a qualified charger on your own.

Indicator light state

	Light state	Product state
Indicator light state	White light flashes	Heating
	White light long on	Heated
	Red light flashes	Low battery
	Red light breathes	Charging
	Red light off after long on for 2 minutes	Fully charged

Tips

- Remove the gun cover before use.
- Do not touch the gun nozzle when the gun is working and the nozzle is hot.
- Do not touch molten glue with bare hands as it is hot.

Precautions:

- Charge before first use as the product is not fully charged before leaving the factory.
- In first use, insert the glue stick to the gear box bayonet for better heating and glue output.
- After use, do not forcibly pull out the leftover glue stick, otherwise, the product may be damaged.
- If the product has been idle for a long time and the state indicator light does not work properly during charging, please still charge the product for 30 minutes and see if it works properly.
- If not in use, stand the product.
- This product shall be used with 7mm glue sticks only (HOTO hot melt glue sticks are preferred).
- When the product is discarded, its battery must be removed by a professional and disposed of safely.

03 Common Faults and Troubleshooting

Maintenance

- Do not keep the product in a high-temperature and high-humidity environment for a long time. If the product is to be idle for a long time, please keep it in an environment with room temperature and normal humidity, and charge the product once every six months.
- Keep the product surface clean. Wipe the product surface with a wet and soft cloth. Do not clean the product with corrosive cleaner.

Faults and troubleshooting

Fault	Cause	Troubleshooting
The product does not work	The hold time is too short	Press and hold “On/Off” button for 3 seconds to power on the machine
	The product is let rest for five minutes	Press and hold “On/Off” button for 3 seconds to power on the machine
	The lithium battery runs low	Charge the machine
Glue is not properly output	The glue stick is used up	Insert a new glue stick
The glue stick cannot be inserted	The glue stick is not in a proper size	Replace the glue stick

04 Product Parameters

Product model: QWRJQ002

Battery capacity: 3,000mAh (Spec. Value)
(Note: *Rated battery capacity: 2,900mAh)

Preheating time: Approx. 30 seconds

Charging parameter: 5V  1A

Product size: Approx. 135 × 127 × 35mm


Charging duration: Approx. 220 minutes

Glue stick size: Approx. 7 × 100mm



Product net weight: Approx. 200g

05 Regulatory Compliance Information

Europe – EU declaration of conformity

 We, Shanghai HOTO Technology Co., Ltd., hereby, declare that this equipment is in compliance with the applicable Directives and European Norms, and amendments.

Disposal and recycling information

 All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which  should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Federal Communications Commission Supplier's Declaration of Conformity

This supplier's declaration of conformity is hereby for
We declare that the above mentioned device has been tested and found in compliance with CFR 47 Part 15 Regulation.

Product: HOTO EasyFlow Hot Glue Gun

Number(s): QWRJQ002

Brand/Trade: HOTO

We declare that the above mentioned device has been tested and found in compliance with CFR 47 Part 15 Regulation.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Representative of Responsible Party for SDoC

Company: HOTO (US) TECHNOLOGY CO LTD

Address: 919 North Market Street, Suite 950, Wilmington DE
19801

Country: U.S.A.

Customer Service(US): +1 855-577-2659

Mon-Fri 9:00am-5:00pm(CST)

Notes for packaging

The packaging materials are recyclable. Please dispose of packaging in an environmentally friendly manner.

DECLARATION OF CONFORMITY



EU Declaration of Conformity

We

Shanghai HOTO Technology Co., Ltd.

Declare that the product:

HOTO EasyFlow Hot Glue Gun/ QWRJQ002

Complies with the essential health and
safety requirements of the

following directives:

2014/30/EU Electromagnetic Compatibility
directive References to the

following harmonized standard were made:

EN55014-1: 2021

EN55014-2: 2021

EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A2:2021

2011/65/EU+ (EU) 2015/863 Restrictions
of the Use of Certain Hazardous

Substances in Electrical and Electronic Equipment

Authorised signatory and technical file holder:

Shanghai HOTO Technology Co., Ltd.

Building 45, No.50 Moganshan Road, Shanghai, China.

Manufacturer: Shanghai HOTO Technology Co., Ltd.

Address: Building 45, No.50 Moganshan Road, Shanghai, China

Designed by **HOTO**