

## Technical Data Sheet

### GENERAL INFORMATION

CORE	Stone Based Hybrid Vinyl
LENGTH	1620mm
WIDTH	146mm
THICKNESS	5.5mm (inc 1mm IXPE)
WEAR LAYER	0.55mm
SURFACE	Natural Wood Look
GLOSS LEVEL	5-8%
COATING	Sentinel coating
ANTI MICROBIAL SURFACE	Yes
BEVEL	Cut bevel
UNIQUE PLANKS	12

### PACKAGING

PLANKS / PACK	8
PACK SIZE	1.89m <sup>2</sup>
PACK WEIGHT	18.21Kg

### MOULDINGS

MATCHING SCOTIA	15 x 28 x 2400 mm
MATCHING T-MOULD	10.5 x 45 x 2400 mm

### INSTALLATION

APPLICATION	Residential & Commercial
JOINING SYSTEM	Tight Lock
INSTALLATION TYPE	Floating
EXPANSION GAP	6mm
ADDITIONAL UNDERLAY	Not allowed
EMBEDDED UNDERFLOOR HEATING	Allowed

### TECHNICAL DATA


WEAR RESISTANCE	EN 13329 / ≥4000 cycles (AC4)
IMPACT RESISTANCE	EN 13329 Annex A / ≥1600mm
INDENTATION RESISTANCE	ISO 24343-1 / ≤0.1mm
SLIP RESISTANCE	AS 4586-2103 / P4
REACTION TO FIRE	EN 13501 / Class Bfl -S1
AIRBORNE SOUND INSULATION	Rw 67db
IMPACT SOUND INSULATION	Ln,w 43db
IMPROVED IMPACT SOUND INSULATION	ΔLw 19dB

### CERTIFICATIONS

GREENGUARD GOLD	Certified
IAC GOLD	Certified
PRODUCT HEALTH DECLARATION	Platinum level
ASSURE	Certified
HAZARDOUS MINERALS	Silica free

### WARRANTIES

RESIDENTIAL	Lifetime
LIGHT COMMERCIAL	15 Years
COMMERCIAL	15 Years

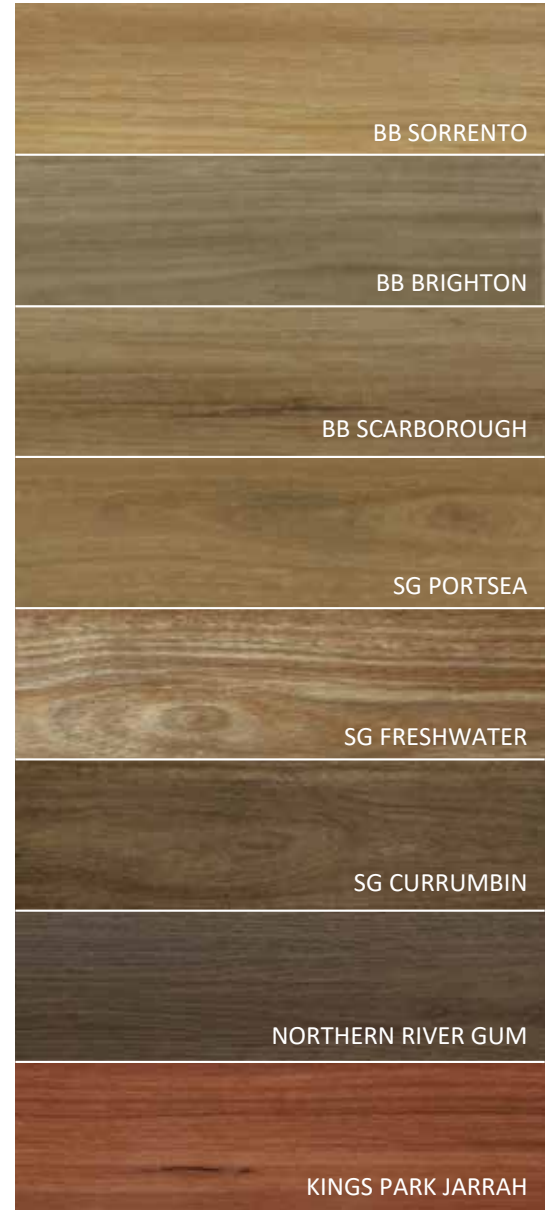

- ✓ 17% better scratch resistance than standard UV Coating (ISO1518)
- ✓ 28% better stain resistance than standard UV Coating (EN438-2)

