

Plusrite®

LED CANOPY LIGHT

RoHS
COMPLIANT



FXSCM59/50K/BK



FXSCM59/50K/BK/SEN



FXGSC75W



FXGSC100W
FXGSC150W



FXRC130/50K



FXCCM200/5K

Key Features

- Excellent thermal design; Reducing Heat and extending life of LED chips.
- Aluminum die-casting and outdoor rated powder coating housing.
- Long life, Unique design provides 50,000 hours life.
- IP65 Rated for outdoor use with 5 year warranty.
- Lumileds 3030 LED chips with high efficiency.
- Flex-In-Plug.

Applications

- Gas Station, Warehouse, Factory, Parking Area, Bus and Train Stations, Outdoor, etc.

TECHNICAL SPECIFICATIONS

Model.	LED TYPE	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Housing colour	Warranty	IP RATING	Dimmable
FXSCM59/50K/BK	SMD	9pcs	5K	90~305V	160°	59W	6785lm	>80	Black	5 years	IP65	1-10V
* FXSCM59/50K/BK/SEN	SMD	9pcs	5K	90~305V	160°	59W	6785lm	>80	Black	5 years	IP65	1-10V
FXGSC75W	SMD	72pcs	4K/5K	90~305V	120°	75W	9000lm	>80	White	5 years	IP65	1-10V
FXGSC100W	SMD	92pcs	4K/5K	90~305V	120°	100W	12000lm	>80	White	5 years	IP65	1-10V
FXGSC150W	SMD	114pcs	4K/5K	90~305V	120°	150W	18000lm	>80	White	5 years	IP65	1-10V
FXRC130/50K	SMD	140pcs	5K	90~305V	120°	130W	13000lm	>80	White	5 years	IP65	NO
FXCCM200/5K	SMD	228pcs	5K	90~305V	100°	200W	19000lm	>80	White	5 years	IP65	NO


* FXSCM59/50K/BK/SEN: This Canopy comes with sensor inside

Plusrite®

LED CANOPY LIGHT




Product Dimension: (mm)

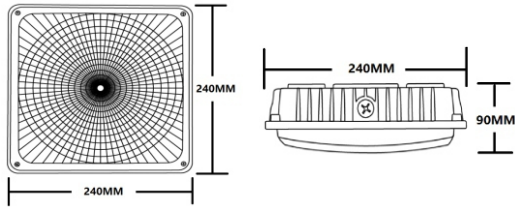

FXSCM59/50K/BK


FXSCM59/50K/BK/SEN




FXGSC75W : A:325mm B:325mm C:228mm

FXGSC100W : A:480mm B:480mm C:245mm

FXGSC150W : A:480mm B:480mm C:245mm



FXRC130/50K : A:420mm B:420mm C:90mm

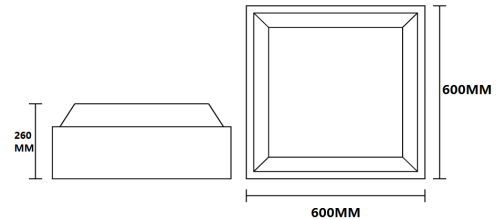

FXCCM200/5K

PACKING DETAILS:

Product: **FXSCM59/50K/BK**
FXSCM59/50K/BK/SEN

Net Weight: 2.35 kg
Outer ctn size: 280*280*145mm
Q'ty per ctn: 1 pc
G.W per ctn: 2.84 kg

Product: **FXGSC75W**

Net Weight: 6.2 kg
Outer ctn size: 410*380*245mm
Q'ty per ctn: 1 pc
G.W per ctn: 8.2 kg

Product: **FXGSC100W**
FXGSC150W

Net Weight: 8.2 kg
Outer ctn size: 720*550*260mm
Q'ty per ctn: 1 pc
G.W per ctn: 10.2 kg



Product: **FXRC130/50K**

Net Weight: 7.35 kg
Outer ctn size: 530*530*195mm
Q'ty per ctn: 1 pc
G.W per ctn: 8 kg

Product: **FXCCM200/5K**

Net Weight: 19.8 kg
Outer ctn size: 680*680*330mm
Q'ty per ctn: 1 pc
G.W per ctn: 22.8 kg

SENSOR information for FXSCM59/50K/BK/SEN

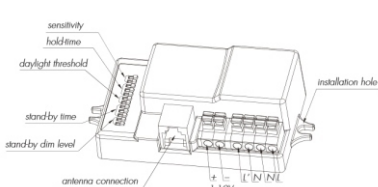

	1	2	
I	●	●	100%
II	●	○	75%
III	○	●	50%
IV	○	○	10%

Sensitivity

	1	2	3	
I	●	●	●	5s
II	●	●	○	30s
III	●	○	●	1min
IV	●	○	○	5min
V	○	●	●	10min
VI	○	○	●	20min
VII	○	○	○	30min

Hold-time

	1	2	
I	●	●	Disable
II	●	○	50Lux
III	○	●	10Lux
IV	○	○	2Lux

Daylight threshold

	1	2	3	
I	●	●	○	0s
II	●	○	○	10s
III	●	○	○	1min
IV	●	○	○	5min
V	○	●	○	10min
VI	○	○	●	30min
VII	○	○	○	1h
VIII	○	○	○	+∞

Stand-by time

	1	2	
I	●	●	10%
II	●	○	20%
III	○	●	30%
IV	○	○	50%

Stand-by dim level