

Wall Faced Toilet Suites

Curve Plus Matte White



15
YEAR
SEAT
WARRANTY

5
YEAR
CERAMIC
WARRANTY

S-Trap Set Out: 105mm - P-Trap Set Out: 180mm - Inlet Type: In-Wall Cistern
Geberit Sigma8 In-Wall Cistern - Works with Sigma20/Sigma40 Flush Plates



WELS Rating Pan Only:



Registration No:
L07889

Avg: 3.3L
Full: 4.6L Half: 3.0L



In-Wall Cistern:



Registration No:
L05087

Avg: 3.4L
Full: 4.5L Half: 3.0L


Technical drawing

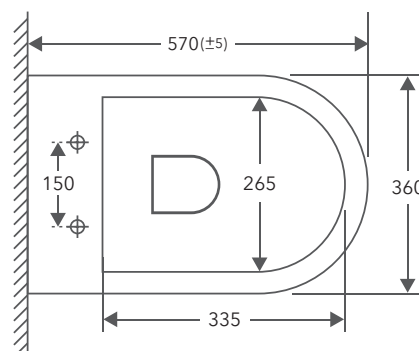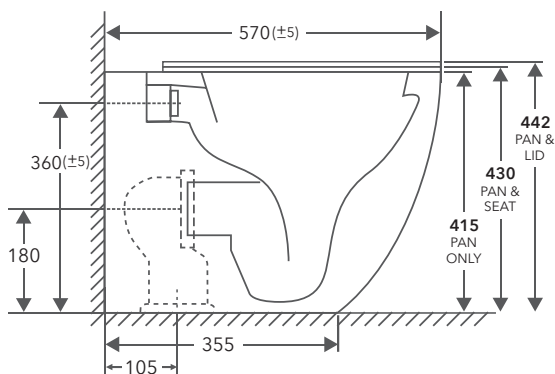

All dimensions are approximate and subject to normal variation between batches.

Although every effort is made not to change the above product specifications, SANCERAMICA reserve the right to do so without prior notification if necessary.

Geberit Sigma concealed cistern 8 cm, 4.5 / 3 litres

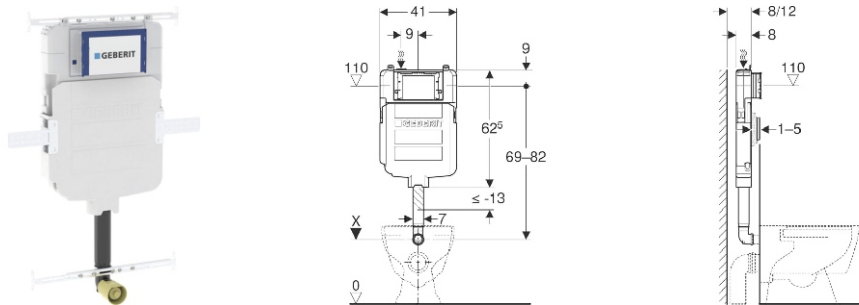

APPLICATION PURPOSES

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs
- For single flush, dual flush or stop-and-go flush

CHARACTERISTICS

- Range 2016
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Cistern fulfils standard requirements in accordance with AS 1172.2:2004
- Immediate post flush possible with factory setting
- Flush bend fitted

- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the top left
- Water supply connection, dezincification-resistant
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length, suitable for surface-even actuator plates

Flush volume small, adjustment range	3–4 l
Product material	Plastic

SCOPE OF DELIVERY

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend 90°
- Flush bend extension, ø 45 mm
- Fastening for flush bend
- 2 sleeves made of EPDM
- Protection plug
- Fastening material for drywall

TECHNICAL DATA

Flow pressure	10–1000 kPa
Water temperature max.	25 °C
Flush volume, factory setting	4.5 / 3 l
Flush volume large, adjustment range	4.5 / 6 / 7.5 l

Art.no.	B cm	H cm	T cm
109.795.00.1	41	62.5	8