

St George

Australia 1947

Product Information

Product Code: Mosman ST-ZTT-500

*Seat Height (Floor to Top of Seat) :435mm

Product Size:683L x 384W X 482H

Set out:


S Trap: 140mm-260mm

P Trap: 180mm

Applicable Voltage : AC 220-240V/50Hz

Power : 1200W

Working Water Pressure: 250kpa - 500kpa

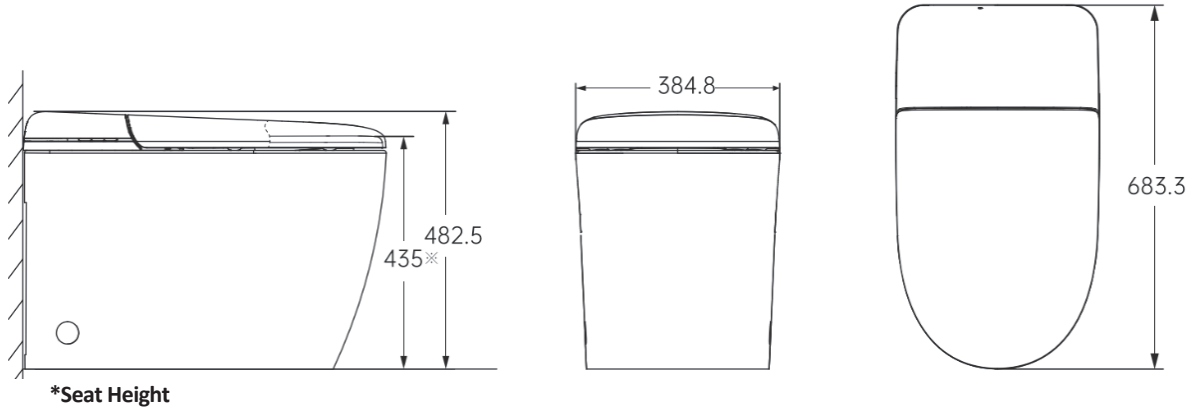

Feature:

Waterfilm™

–Pre-rinses the bowl surface to reduce stains and improve hygiene.

Verticoat™ Ceramic Shield

–An enhanced ultra-smooth glaze that minimizes surface friction, reducing build-up and maintaining a cleaner bowl with less effort.

Built-in Tank

–Integrated water tank ensures stable flushing even with low pressure.

Antibacterial Surface

–Special surface treatment helps inhibit bacterial growth.

Automatic open/close Lid

UV Sterilization – Washing Water

–UV-treated water for enhanced hygiene during washing.

UV Sterilization – Wand

–UV sterilization keeps the spray wand clean and sanitary.

Automatic Flush

–Hands-free automatic flushing for improved hygiene.

Pulsating Cleansing

–Pulsating water spray for a massage-like cleansing effect.

Female Soft Cleansing

Deodoriser


–Automatic deodorising system keeps the bathroom fresh.

Heated Seat

Dryer

Night Light

Energy Saving

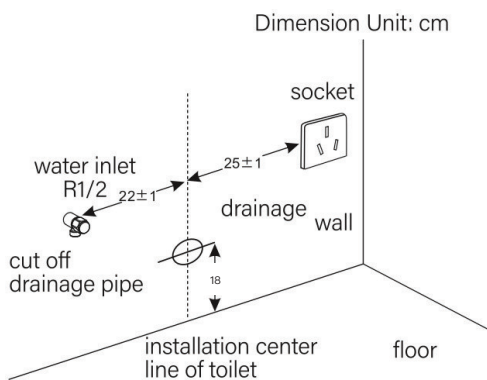

Remark: It is recommended to install water and electricity according to the dimensions shown in the diagram, otherwise it may cause the risk of pipe bending.

*Toilet complies with WMTS-051 and features an integrated Atmospheric Vacuum Breaker (AVB) that satisfies the high-hazard back-flow prevention criteria of AS/NZ 3500.1 without the use of an RPZ valve.

*Installation shall be in accordance with the AS/NZS 3500 series of standards.

*Portable water only. DO NOT USE seawater OR recycled water.

*Min water requirement 5L/ 15 second and water pressure at least 200 KPA stable. Maximum water pressure capacity 500 KPA.

*All rights reserved by Bravat Global Pty Ltd. Specifications and sizes are subject to change without notice

*Warranty: 3 years parts and labor for seat, 20 years ceramic pan.

