

## DATA SHEET

SV-SCACC-22-5W

Version 3

SEVR

sevr.au

# 5m 22KW EV CHARGING CABLE




## Description

Introducing our premium 22kW Type 2 Charging Cable, designed for efficiency, durability, and convenience. This 5-meter cable offers rapid and reliable charging, compatible with most modern electric vehicles adhering to Australian standards. Its optimal length provides the flexibility needed for hassle-free connections to charging stations, while the robust design ensures long-lasting performance in various weather conditions. It is compatible with most electric vehicles with its Type 2 male and female plugs.

## Features and benefits:

- IP55
- 22kW - 32A
- Type 2 male & female plugs
- 5m cable length

## Connectors:

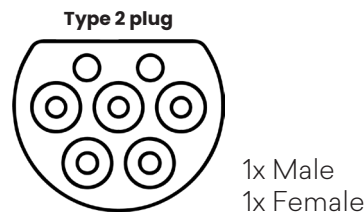

## Technical Information

|                           | SV-SCACC-22-5W                         |
|---------------------------|--|
| Input/Output Current      | 16A-32A                                |
| Max Output Power          | 22KW                                   |
| Input/Output Voltage      | 380~480V(AC)                           |
| Insulation Resistance     | >1000MΩ (DC500v)                       |
| Withstand Voltage         | 2000V                                  |
| Pin Material              | Copper Alloy, Silver Plating           |
| Plug Material             | ABS+PC, Flame Retardant Grade UL94 V-0 |
| Operating Temperature     | -30°C ~ +50°C                          |
| Contact Resistance        | 0.5MΩ Max                              |
| Terminal Temperature Rise | >300N                                  |
| Dimensions                | 5m                                     |
| IP Rating                 | 55                                     |
| Certification             | CE, UKCA, CB, TUV, RoHS                |

The information contained in this document is the sole property of SEVR Group. Any reproduction in part or as a whole without the written permission of SEVR Group is prohibited.

sales@sevr.au | www.sevr.au