

Tablet Mount for Wall & Cabinet

Full Motion: Rotate, Fold, Swivel & Tilt



Black

**Black &
White**








For more information: [barkanmounts.com](https://www.barkanmounts.com)


If you are satisfied with the product, please give us a 5 stars ★★★★★ rating on the website you bought it from. If you are not satisfied please contact us at <https://www.barkanmounts.com/support> and we will solve the problem for you.




**Safety instructions and installation warnings (provided separately)
must be read in full, prior to assembly.**

A Clamp 		Z1 Screw  x3
Z2 Bolt  x3	Z3 T-Nut  x3	Z4 Washer  x3
Z5 Anchor  x3	Z6 Allen key 	Z7 PVC pads  x2


Required Tools

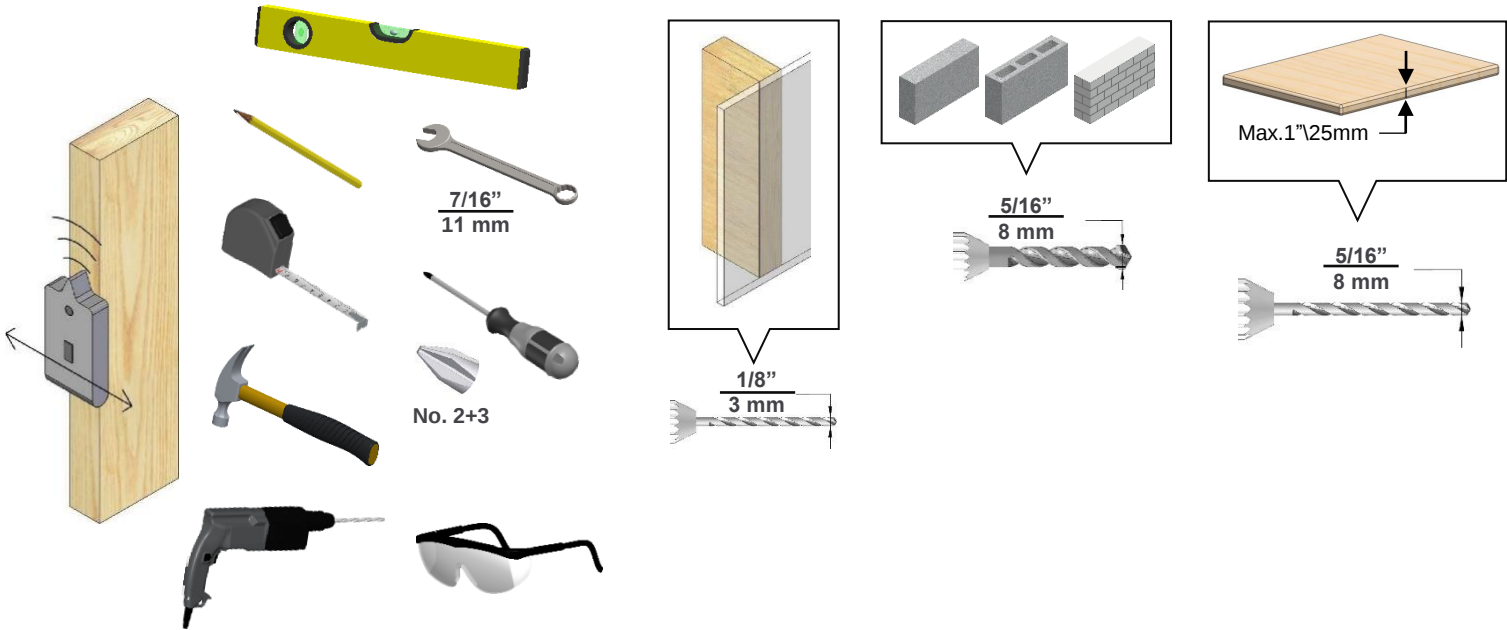


- 1** Place the PVC pads inside the clamp holders

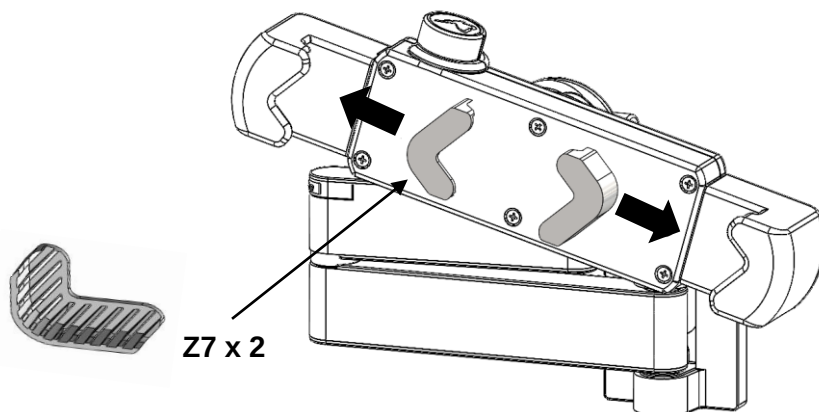


- 2** Loosen the screw, open the ruler on the back according to your device size and tighten the screw.
Example – for a device that is 10" to 11", open the ruler to 10"

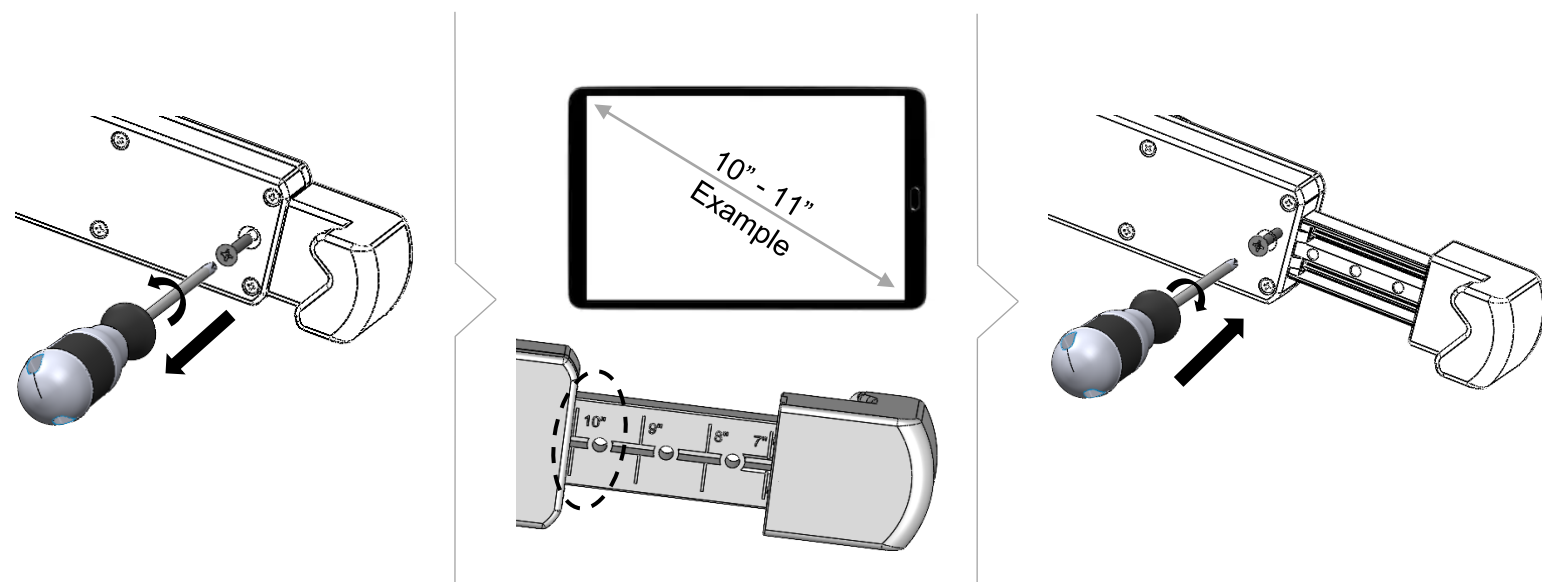




- 3** Wall installation

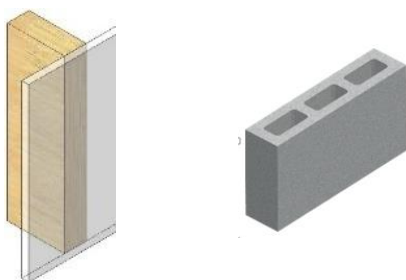


- Wooden surface installation




- 4** Follow the steps according to your wall type




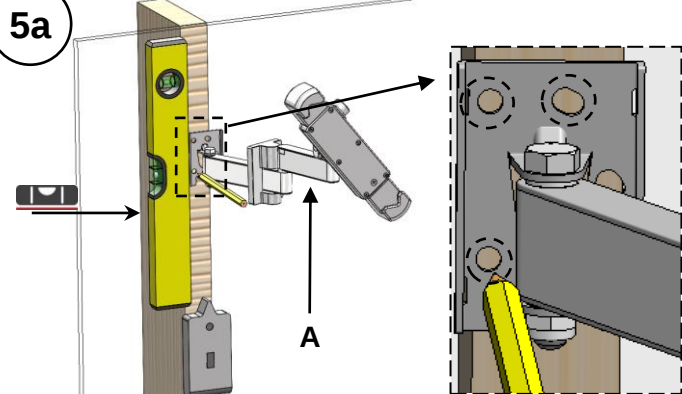


Use a Stud Finder

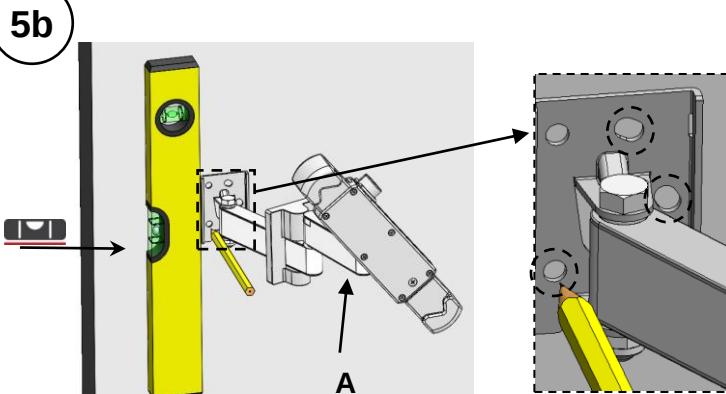



Make sure all holes are drilled inside the studs

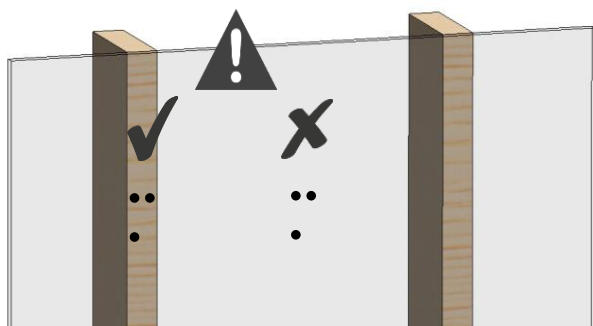


Drill with 5/16" \ 8 mm drill bit

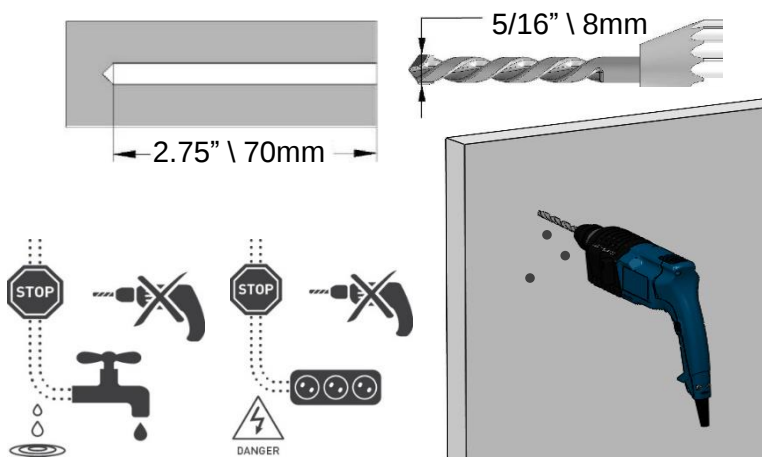


Drill with 1/8" \ 3mm drill bit

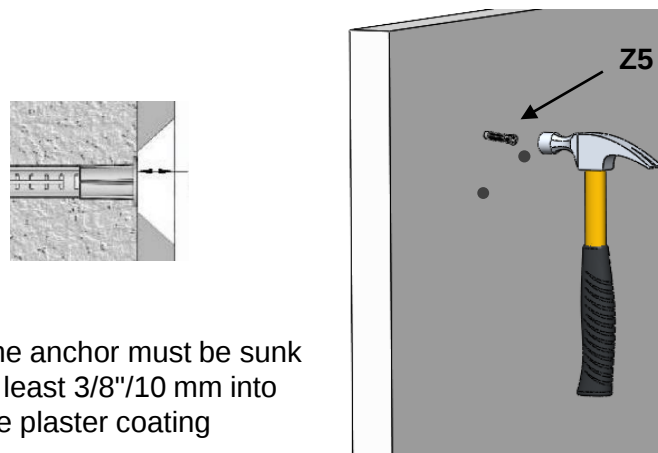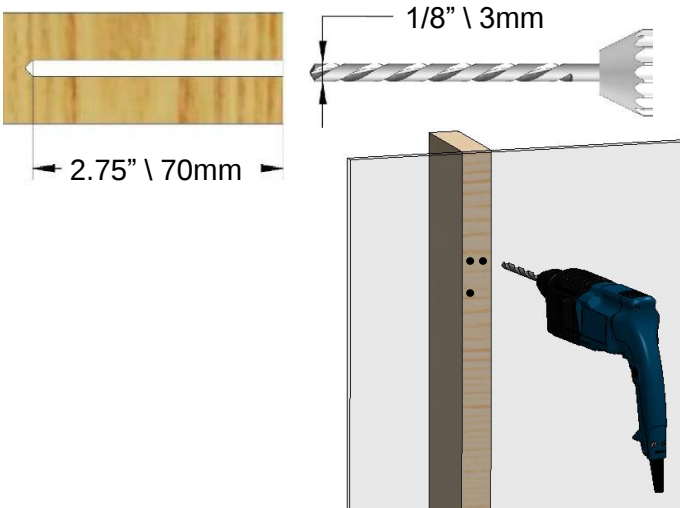

The anchor must be sunk at least 3/8"/10 mm into the plaster coating

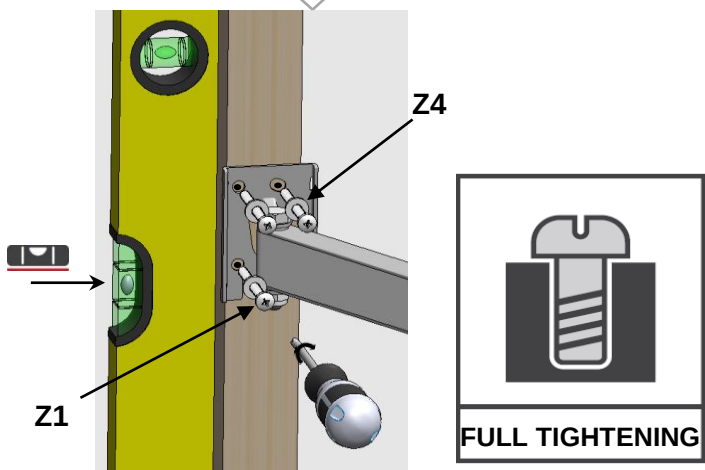

FULL TIGHTENING



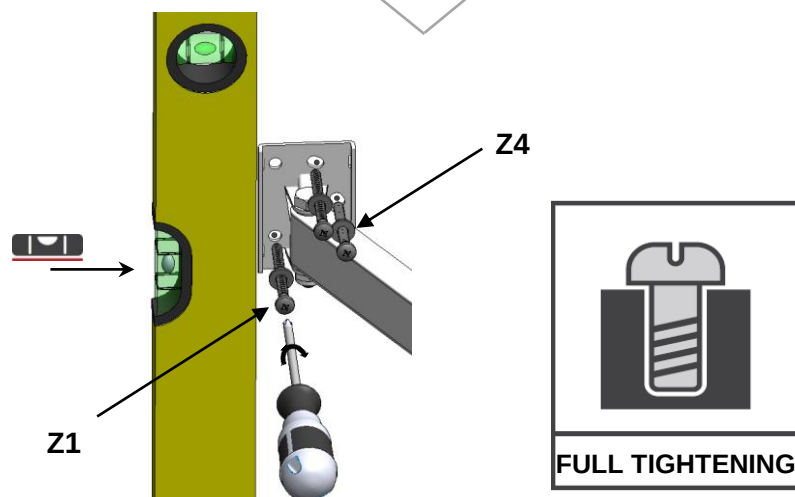


FULL TIGHTENING

6

Weight test

Apply force on the upper part of the mount and make sure it is well connected

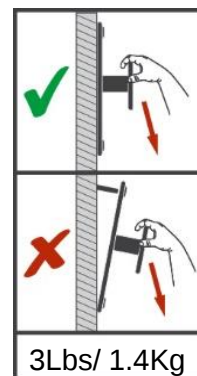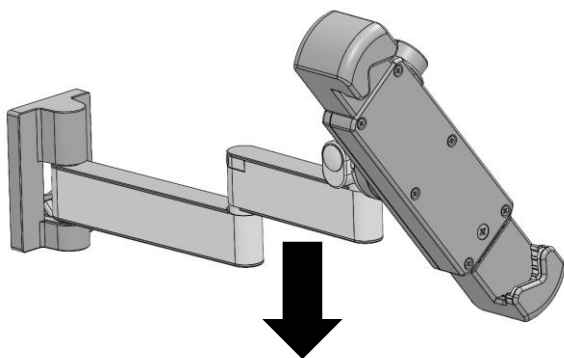


8


7

Wooden surface installation

Mark the holes


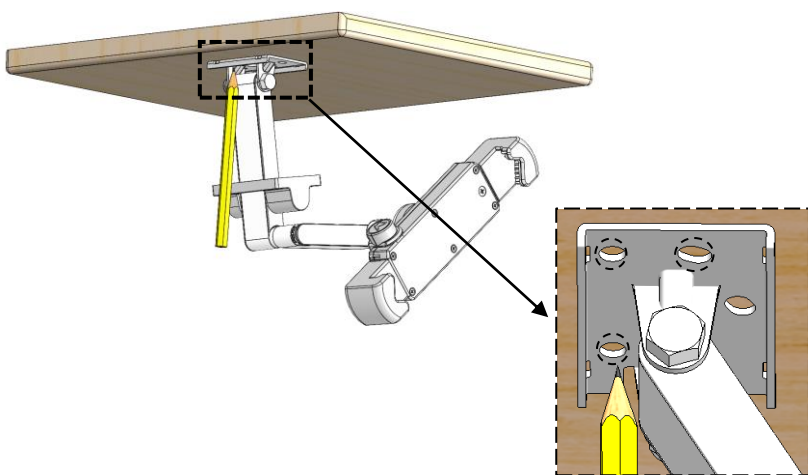


Drill with 5/16" \ 8mm drill bit

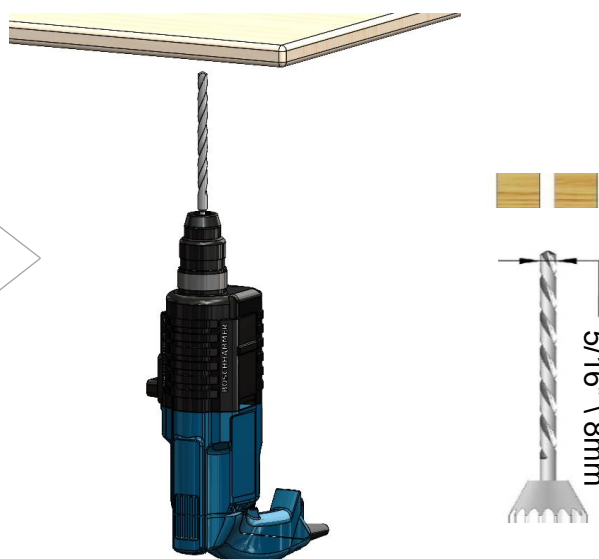

Weight test


Apply force downwards on the tablet clamp and make sure it is well connected

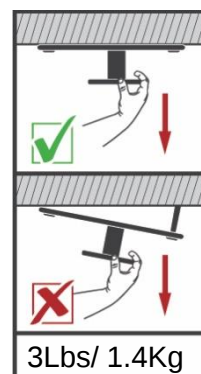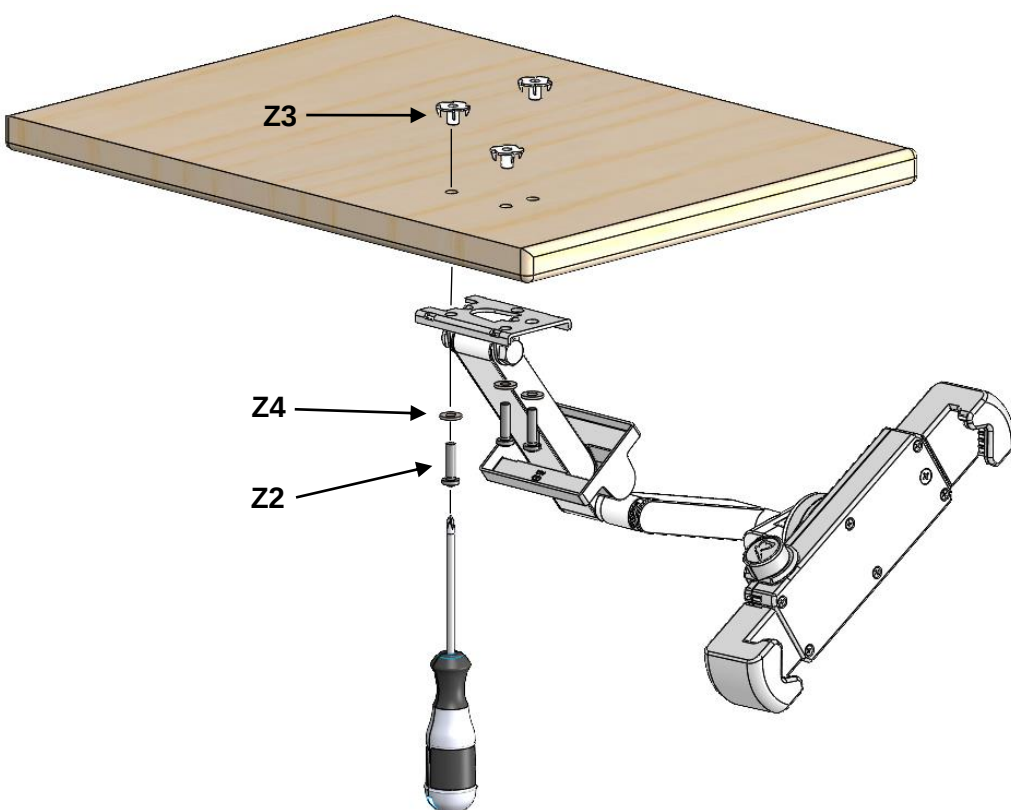

8

Tilt adjustment

1. Remove the plastic cover.
2. Using the Allen key (Z6), tighten the screw in order to create the necessary friction.
3. Position the tablet at the desired tilt angle.
4. Return the plastic cover.
5. Rotate the tablet to the desired position.


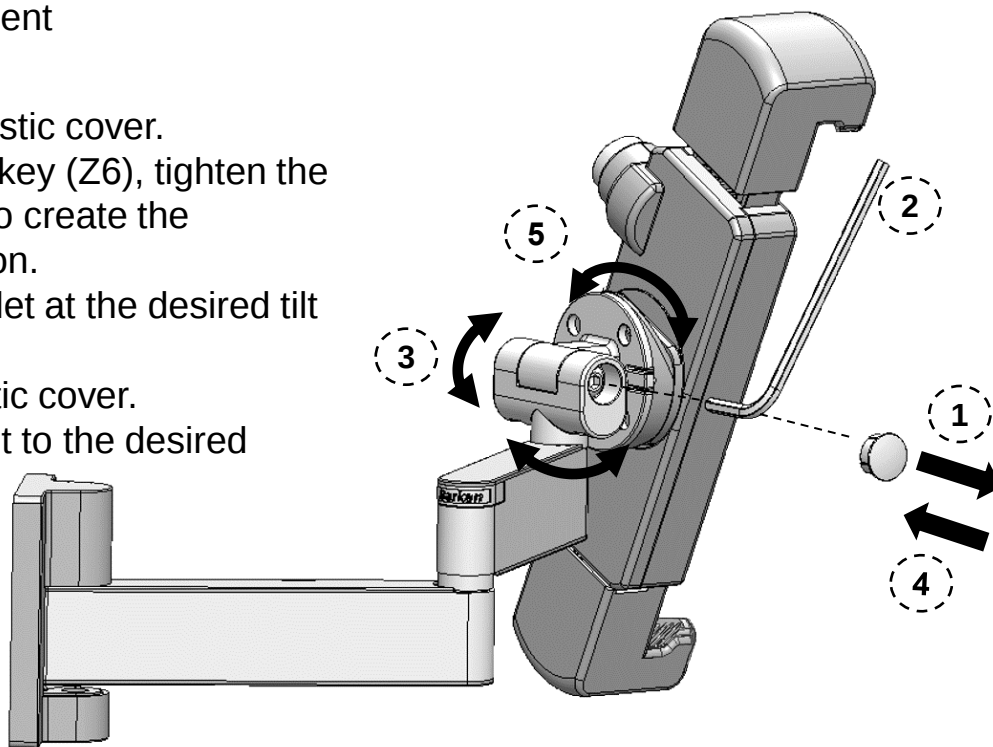


9

Tablet installation

Open the clamp



Close the clamp on your device

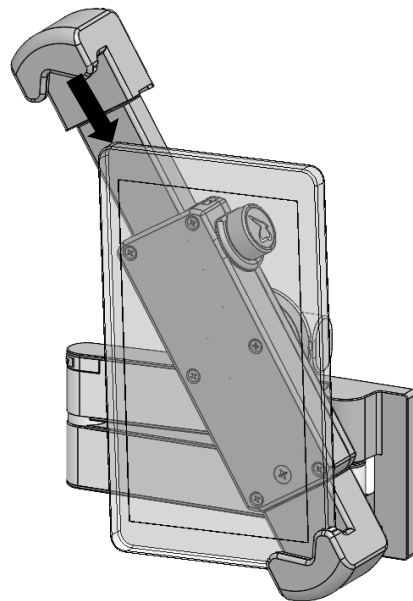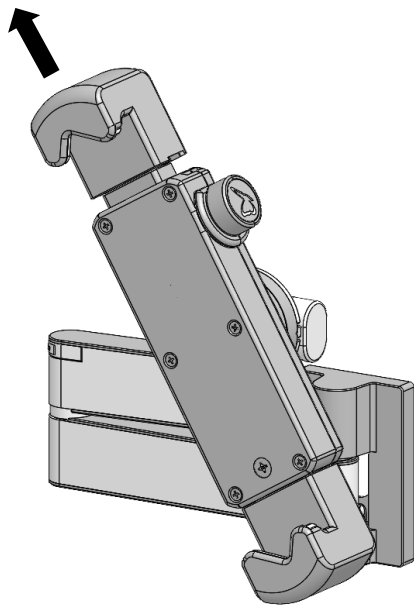

10

Maintenance

1. Remove the tablet
2. Remove the plastic cover.
3. Tighten the nut.
4. Return the plastic cover.

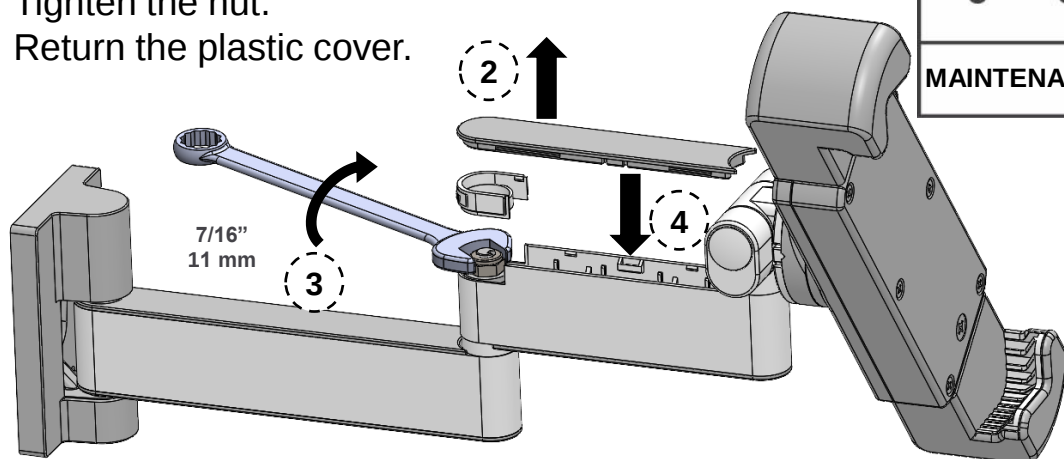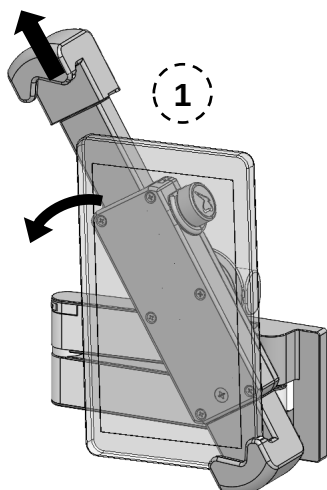

MAINTENANCE