

PLAY

PLAY BATH FILLER WITH MIXER

Featuring elegant curved lines and a classic lever handle, the Play collection from PARISI lends to a timeless look suitable for all bathrooms.



Product Code
HP.08-1F.E


Features
Freestanding bath spout
Ø115mm flange

Colour
Chrome



Manufactured by

PARISI


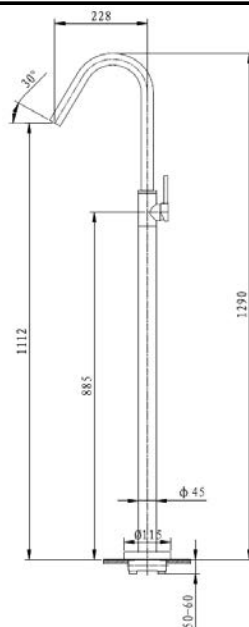


Note: All dimensions are in millimetres and are subject to normal manufacturing variations. Parisi Bathware Pty Ltd reserves the right to vary specifications at any time without notice.

ENVY BATH FILLER WITH MIXER

INSTALLATION INSTRUCTIONS

PP. 08-1F & PP. 08-1F. E

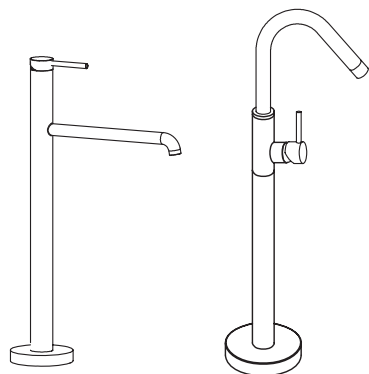

Installation Note


1. The internal parts of the bath filler have been professionally installed and tested in the factory. Do not disassemble as doing so may void the warranty.
2. Before installing make sure you flush the water pipes to avoid blockages in the mixer which may affect the flow rate and function of the bath filler
3. Install the bath filler in accordance with the installation guide and dimensions provided. Do not force any part of the installation to avoid damage.
4. Make sure you connect the hot water to the left hand side and the cold water to the right hand side of the body
5. After installing the body, check all of the connections are sealed and not leaking.

Cleaning & Care Instructions


1. For day to day cleaning To clean, rinse with water and dry with a soft cloth
2. To clean stains or dirt on the surface, use a mild liquid soap, rinse with water and dry with a soft cloth
3. Avoid abrasive cleaners or scourers to clean the mixer
4. Avoid using acidic cleaners of polishes to clean the mixer

Operation instruction


1. The mixers have a tilt turn operation, turn left for hot, right for cold and tilt for water pressure.
2. The working pressure is 50-500KPA
3. The working temperature is less than 90 degrees (recommended 80 degrees)




1. The mixer body needs to be installed so it sits 50-55mm below the finished floor level. Place the body on the floor and mark the 4x fixing points. Drill 4x 10mm diameter holes.




2. Install the expansion bolts leaving approximately 25mm exposed.

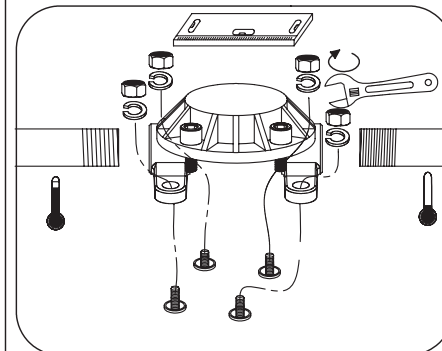

3. Fit the hot water pipe to the left hand side of the body and cold water pipe to the right hand side of the body. Remove the nut and washer from the body and place the body over the expansion bolts, refit the nut and washer onto the expansion bolts to secure the body to the floor. Make sure the body is sitting level on the floor

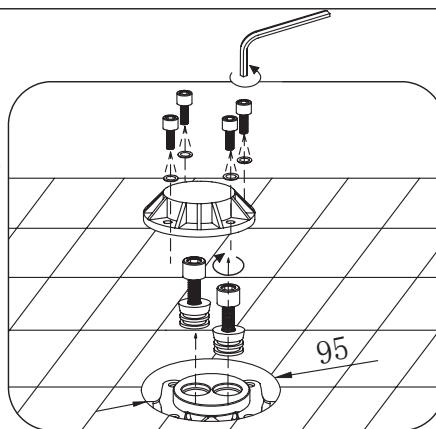

4. Test the pressure and make sure there are no leaks. Leave a 95mm cut out around the body for installation. When you are ready to install the mixer, remove the 4x hexagonal screws holding the plastic cover and unscrew the test plugs to reveal 2x inlet holes.

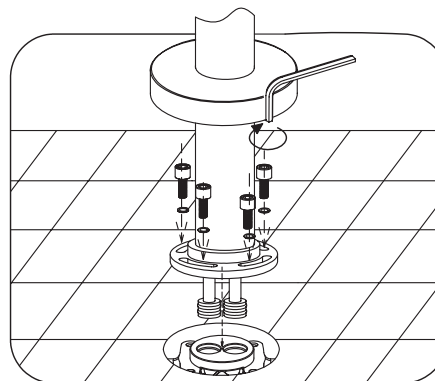

5. Slide the floor cover up the mast, plug the hot water connector on the left and the cold water connector on the right. Fasten the mast to the base using the hexagonal screws removed in step 4. Slide the cover down the mast to the floor.

PARISI