



EMC Technologies Pty Ltd

ABN 82 057 105 549
176 Harrick Road
Keilor Park
Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

SAR Test Report

Report Number: M160351R1
(Replacing M160351)

Test Sample: Cellsafe Lif3 for Samsung Galaxy S7
series mobile phone

Phone Types: Samsung Galaxy S7, Galaxy S7 Edge

Tested For: Cellsafe Pty Ltd

Date of Issue: 15th June 2016

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accreditation No. 5292

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

CONTENTS

1.0 GENERAL INFORMATION.....	3
2.0 DESCRIPTION OF DEVICE.....	4
2.1 Description of Test Sample	4
2.2 Test sample Accessories	4
2.2.1 Battery Types	4
2.3 Test Signal, Frequency and Output Power.....	4
2.4 Conducted Power Measurements	5
2.5 Battery Status.....	5
2.6 Details of Test Laboratory	5
2.6.1 Location.....	5
2.6.2 Accreditations	5
2.6.3 Environmental Factors.....	6
3.0 CALIBRATION AND VERIFICATION PROCEDURES AND DATA	6
3.1.1 Deviation from reference values	6
3.1.2 Temperature and Humidity	6
4.0 SAR MEASUREMENT PROCEDURE USING DASY5	7
5.0 MEASUREMENT UNCERTAINTY	8
6.0 EQUIPMENT LIST AND CALIBRATION DETAILS	10
7.0 SAR TEST METHOD	11
7.1 Description of the Test Positions (Head and Body Sections).....	11
7.1.1 "Touch Position"	11
7.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes etc)	11
7.3 ARPANSA RF Exposure Limits for ACMA (Australia) and EN 50360	11
8.0 SAR EVALUATION RESULTS	12
9.0 RESULTS STATEMENT.....	14
APPENDIX A1 Test Sample Photographs	15
APPENDIX A2 Test Sample Photographs	16
APPENDIX A3 Test Sample Photographs	17
APPENDIX A4 Test Sample Photographs	18
APPENDIX A5 TEST SETUP PHOTOGRAPHS	19
APPENDIX A6 Test Setup Photographs.....	20
APPENDIX B Plots Of The SAR Measurements.....	21
APPENDIX C DESCRIPTION OF SAR MEASUREMENT SYSTEM	42
Probe Positioning System.....	42
E-Field Probe Type and Performance.....	42
Data Acquisition Electronics	42
Device Holder for DASY5	42
Liquid Depth 15cm.....	42
Phantom Properties (Size, Shape, Shell Thickness, Tissue Material Properties).....	42
Simulated Tissue Composition Used for SAR Test.....	43
APPENDIX D CALIBRATION DOCUMENTS	44



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

SAR Test Report

Cellsafe Lif3 for Samsung Galaxy S7 series mobile phone,
Type: Samsung Galaxy S7, Galaxy S7 Edge **Report Number:** M160351R1

1.0 GENERAL INFORMATION

Test Sample: Cellsafe Lif3 for Samsung Galaxy S7 series mobile phone

Type:	Samsung Galaxy S7	Samsung Galaxy S7 Edge
Serial Number:	R58H30DJD3V	R28H32JAVSP
Model Number:	SM-G930F	SM-G9350

Manufacturer: Samsung Electronics

Device Category: Portable Transmitter

Test Device: Production Unit

RF exposure Category: General Public/Unaware user

Tested for: Cellsafe Pty Ltd

Address: 14/1866 Princes Hwy, Clayton, Vic 3168

Contact: Nicole Bennett

Phone: 9544 4886

Email: sales@cellsafe.com.au

- Test Standard/s:**
1. Maximum Exposure Levels to Lif3ofrequency Fields – 3kHz to 300GHz, ARPANSA
 2. **EN 62209-1:2006 and EN 62209-2:2010**
Human exposure to Lif3o frequency fields from hand-held and body-mounted devices-Human models, instrumentation and procedures.
Part 1: Procedure to determine the specific absorption rate (SAR) for hand- held devices used in close proximity to the ear (frequency range 300 MHz to 3 GHz)
Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

Results Statement: The Cellsafe Lif3 for Samsung Galaxy S7 series mobile phone, Types: Samsung Galaxy S7, Galaxy S7 Edge, was tested according to EN 50360, New Zealand and Australian Communications and Media Authority requirements for human exposure to Lif3o frequencies. The Cellsafe Lif3 device was found to reduce SAR in the configurations described in this report by up to 90.1%.

Test Dates: 15th to 19th April 2016

Test Officer:


Peter Jakubiec

Authorised Signature:


Chris Zombolas
Technical Director



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

2.0 DESCRIPTION OF DEVICE

2.1 Description of Test Sample

The device tested was a Samsung Galaxy S7 series mobile phone fitted with Cellsafe Lif3 RF reduction chip, and it was tested in the 850 MHz and 1900 MHz WCDMA frequency bands. It will be referred to as the Device Under Test (DUT) throughout this report. The DUT was tested in the Head Touch Left and Touch Right Positions.

Table: DUT (Device Under Test) Parameters

Operating Mode During Testing	: See Clause 2.3
Operating Mode Production Sample	: UMTS
Modulation:	: QPSK
Antenna type	: Internal
Applicable Head Configurations	: Touch Left and Touch Right
Applicable Body Worn-Configurations	: None
Battery Options	: Internal non removable Li-ion

2.2 Test sample Accessories

2.2.1 Battery Types

SAR measurements were performed with the standard Li-ion battery.

2.3 Test Signal, Frequency and Output Power

The DUT was provided by Cellsafe Pty Ltd. It was put into operation using a Rhodes & Schwarz Lif3o Communication Tester CMU200. The channels and power classes utilised in the measurements are listed in the tables below.

The SAR level of the test sample was measured for the frequency bands as shown in the table below. Communication between the tester and the DUT was maintained by an air link.

Table: Test Frequencies and Power Classes

Band	Frequency (MHz)			Traffic Channels			Band Power Class	Nominal Power (dBm)
	Low	Mid	High	Low	Mid	High		
UMTS Band 2	N/A	1880.0	N/A	N/A	9400	N/A	3	24
UMTS Band 5	N/A	836.6	N/A	N/A	4183	N/A	3	24



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

2.4 Conducted Power Measurements

The conducted power of the DUT was not measured because the device does not have easily accessible RF test port.

2.5 Battery Status

The DUT battery was fully charged prior to commencement of each measurement. The battery condition was monitored by measuring the RF power at a defined position inside the phantom before the commencement of each test and again after the completion of the test.

2.6 Details of Test Laboratory

2.6.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

2.6.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA). **NATA Accredited Laboratory Number: 5292**

Last assessed in February 2014, next scheduled assessment in February 2017

EMC Technologies Pty Ltd is NATA accredited for the following RF Human Exposure standards:

AS/NZS 2772.2 2011:	Lif3ofrequency Fields. Part 2: Principles and methods of measurement and computation - 3kHz to 300 GHz.
ACMA:	Radiocommunications (Electromagnetic Radiation — Human Exposure) Standard
EN 50360: 2001	Product standard to demonstrate the compliance of Mobile Phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 62209-1:2006	Human exposure to Lif3o frequency fields from hand-held and body-mounted devices-Human models, instrumentation and procedures. Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range 300 MHz to 3 GHz)
EN 62209-2:2010	Human Exposure to Lif3o frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
IEEE 1528: 2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

2.6.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within 21 ± 1 °C, the humidity was in the range 50% to 51%. See section 3.1.2 for measured temperature and humidity. The liquid parameters were measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY5 SAR measurement system using the ET3DV6 E-field probe is less than $5 \mu\text{V}$ in both air and liquid mediums.

3.0 CALIBRATION AND VERIFICATION PROCEDURES AND DATA

Prior to the SAR assessment, the system verification kit was used to verify that the DASY5 was operating within its specifications. The system check was performed at the frequencies listed below using the SPEAG calibrated dipoles. The reference dipoles are highly symmetric and matched at the centre frequency for the specified liquid and distance to the phantom. The accurate distance between the liquid surface and the dipole centre is achieved with a distance holder that snaps onto the dipole. System verification is performed by feeding a known power level into a reference dipole, set at a known distance from the phantom. The measured SAR is compared to the theoretically derived level, and must be within $\pm 10\%$.

3.1.1 Deviation from reference values

The EN62209 reference SAR values are derived numerically for a given phantom and dipole construction, at the frequencies listed below. These reference SAR values are obtained from the EN62209 standard and are normalized to 1W.

The SPEAG calibration reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the verification dipole during calibration. The measured ten-gram SAR should be within $\pm 10\%$ of the expected target reference values shown in table below.

Table: Deviation from reference validation values

Date	Frequency (MHz)	Measured SAR 10g (input power = 250mW)	Measured SAR 10g (Normalized to 1W)	SPEAG Calibration Reference SAR Value 10g (mW/g)	Deviation From SPEAG 10g (%)	EN62209 Reference SAR Value 10g (mW/g)	Deviation From EN62209 10g (%)
15 th Apr. 16	900	1.73	6.92	6.79	1.91	6.99	-1.00
18 th Apr. 16	1800	4.67	18.68	20.1	-7.06	20.1	-7.06
19 th Apr. 16	900	1.73	6.92	6.79	1.91	6.99	-1.00

Note: All reference SAR values are normalized to 1W input power.

3.1.2 Temperature and Humidity

The humidity and dielectric/ambient temperatures are recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than $|2|^\circ\text{C}$.

Table: Temperature and Humidity recorded for each day

Date	Ambient Temperature (°C)	Liquid Temperature (°C)	Humidity (%)
15 th April 2016	20.9	20.6	51
18 th April 2016	20.8	20.6	50
19 th April 2016	20.8	20.5	50



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

4.0 SAR MEASUREMENT PROCEDURE USING DASY5

The SAR evaluation was performed with the SPEAG DASY5 System (**Version 52**). A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the DUT. The SAR at this point is measured at the start of the test and then again at the end of the test.
- b) The SAR distribution at the exposed side of the head or the flat section of the flat phantom is measured at a distance of 4.0 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 15 mm x 15 mm. The actual largest Area Scan has dimensions of 105 mm x 200 mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 32 mm x 32 mm x 30 mm is assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 4 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured and the power drift is recorded.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

5.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the EN 62209-1 and EN62209-2 for both Handset SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently and the total uncertainty for both evaluations (95% confidence level) must be less than 30%.

Table: Uncertainty Budget for DASY5 Version 52 – DUT SAR test

Error Description	Uncert. Value	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i	10g u _i	v _i
Measurement System								
Probe Calibration	6	N	1.00	1	1	6.00	6.00	∞
Axial Isotropy	4.7	R	1.73	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	1.73	0.7	0.7	3.88	3.88	∞
Boundary Effects	1	R	1.73	1	1	0.58	0.58	∞
Linearity	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	1	R	1.73	1	1	0.58	0.58	∞
Modulation response	2.4	R	1.73	1	1	1.39	1.39	∞
Readout Electronics	0.3	N	1.00	1	1	0.30	0.30	∞
Response Time	0.8	R	1.73	1	1	0.46	0.46	∞
Integration Time	2.6	R	1.73	1	1	1.50	1.50	∞
RF Ambient Noise	3	R	1.73	1	1	1.73	1.73	∞
RF Ambient Reflections	3	R	1.73	1	1	1.73	1.73	∞
Probe Positioner	0.4	R	1.73	1	1	0.23	0.23	∞
Probe Positioning	2.9	R	1.73	1	1	1.67	1.67	∞
Post Processing	2	R	1.73	1	1	1.15	1.15	∞
Test Sample Related								
Power Scaling	0	R	1.73	1	1	0.00	0.00	∞
Test Sample Positioning	2.9	N	1.00	1	1	2.90	2.90	145
Device Holder Uncertainty	3.6	N	1.00	1	1	3.60	3.60	∞
Output Power Variation – SAR Drift Measurement	3.84	R	1.73	1	1	2.22	2.22	∞
Phantom and Setup								
Phantom Uncertainty	7.6	R	1.73	1	1	4.39	4.39	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.85	1.24	∞
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.73	1.41	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.60	1.08	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.49	1.50	1.23	∞
Temp.unc. - Conductivity	3.4	R	1.73	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4	R	1.73	0.23	0.26	0.05	0.06	∞
Combined standard Uncertainty (u _c)						11.68	11.45	
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k= 2			23.36	22.89	

Estimated total measurement uncertainty for the DASY5 measurement system was $\pm 11.45\%$. The expanded uncertainty ($K = 2$) was assessed to be $\pm 22.89\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Table: Uncertainty Budget for DASY5 Version 52 – Validation

Error Description	Uncert. Value	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i	10g u _i	v _i
Measurement System								
Probe Calibration	6	N	1.00	1	1	6.00	6.00	∞
Axial Isotropy	4.7	R	1.73	1	1	2.71	2.71	∞
Hemispherical Isotropy	9.6	R	1.73	0	0	0.00	0.00	∞
Boundary Effects	1	R	1.73	1	1	0.58	0.58	∞
Linearity	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	1	R	1.73	1	1	0.58	0.58	∞
Modulation response	0	R	1.73	1	1	0.00	0.00	∞
Readout Electronics	0.3	N	1.00	1	1	0.30	0.30	∞
Response Time	0	R	1.73	1	1	0.00	0.00	∞
Integration Time	0	R	1.73	1	1	0.00	0.00	∞
RF Ambient Noise	1	R	1.73	1	1	0.58	0.58	∞
RF Ambient Reflections	1	R	1.73	1	1	0.58	0.58	∞
Probe Positioner	0.8	R	1.73	1	1	0.46	0.46	∞
Probe Positioning	6.7	R	1.73	1	1	3.87	3.87	∞
Post Processing	2	R	1.73	1	1	1.15	1.15	∞
Dipole Related								
Deviation of exp. dipole	5.5	R	1.73	1	1	3.18	3.18	∞
Dipole Axis to Liquid Dist.	2	R	1.73	1	1	1.15	1.15	∞
Input power & SAR drift	3.40	R	1.73	1	1	1.96	1.96	∞
Phantom and Setup								
Phantom Uncertainty	4	R	1.73	1	1	2.31	2.31	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.85	1.24	∞
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.73	1.41	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.60	1.08	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.26	0.26	0.65	0.65	∞
Temp.unc. - Conductivity	3.4	R	1.73	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4	R	1.73	0.23	0.26	0.05	0.06	∞
Combined standard Uncertainty (u _c)						10.05	9.81	
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k= 2			20.10	19.63	

Estimated total measurement uncertainty for the DASY5 measurement system was $\pm 9.81\%$. The expanded uncertainty ($K = 2$) was assessed to be $\pm 19.63\%$ based on 95% confidence level. The uncertainty is not added to the Validation measurement result.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

6.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table: SPEAG DASY5 Version 52

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	✓
SAM Phantom	SPEAG	N/A	1060	Not applicable	✓
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	ELI 4.0	1101	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	11-Jan-2017	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	07-Dec-2016	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	10-Dec-2016	✓
Probe E-Field	SPEAG	ET3DV6	1377	11-June-2016	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3956	15-June-2016	
Probe E-Field	SPEAG	EX3DV4	7358	11-Dec-2016	
Validation Source 150 MHz	SPEAG	CLA150	4003	3-Dec-2016	
Antenna Dipole 300 MHz	SPEAG	D300V3	1012	09-Dec-2016	
Antenna Dipole 450 MHz	SPEAG	D450V3	1074	09-Dec-2016	
Antenna Dipole 600 MHz	SPEAG	D600V3	1008	16-Oct-2018	
Antenna Dipole 750 MHz	SPEAG	D750V2	1051	13-Dec-2016	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	09-Dec-2017	✓
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	05-Dec-2017	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	05-Dec-2017	✓
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	09-Dec-2016	
Antenna Dipole 2300 MHz	SPEAG	D2300V2	1032	10-Dec-2016	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	10-Dec-2016	
Antenna Dipole 2600 MHz	SPEAG	D2600V2	1044	13-Dec-2016	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	13-July-2013	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	16-Dec-2016	
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	✓
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	
Synthesized signal generator	Hewlett Packard	86630A	3250A00328	*In test	✓
RF Power Meter	Hewlett Packard	437B	3125012786	*In test	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	06-Oct-2016	✓
RF Power Meter	Rohde & Schwarz	NRP	101415	16-Oct-2016	
RF Power Sensor	Rohde & Schwarz	NRP - Z81	100174	19-Oct-2017	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	03-Oct-2016	
Network Analyser	Hewlett Packard	8753ES	JP39240130	03-Dec-2016	
Network Analyser	Hewlett Packard	8753D	3410A04122	04-Feb-2017	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓
Thermometer	Digitech	QM7217	T-103	27-Aug-2016	
Thermometer	Digitech	QM7217	T-104	15-Jan-2017	✓

* Calibrated during the test for the relevant parameters.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

7.0 SAR TEST METHOD

7.1 Description of the Test Positions (Head and Body Sections)


The SAR measurements are performed on the left and right sides of the head in the Touch position using the centre frequency of each operating band. The testing was performed with the Cellsafe Lif3 RF reduction Chip fitted to the phone, and repeated with no Cellsafe Lif3 RF reduction Chip for direct comparison.

See Appendix A for photos of test positions.

7.1.1 "Touch Position"

The device was positioned with the vertical centre line of the body of the device and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, the vertical centre line was aligned with the reference plane containing the three ear and mouth reference points. (Left Ear, Right Ear and Mouth). The centre of the earpiece was then aligned with the Right Ear and Left Ear.

The Mobile Phone was then moved towards the phantom with the earpiece aligned with the line between the Left Ear and the Right Ear, until the Mobile Phone just touched the ear. With the device maintained in the reference plane, and the Mobile Phone in contact with the ear, the bottom of the Mobile Phone was moved until the front side of the Mobile Phone was in contact with the cheek of the phantom, or until contact with the ear was lost.

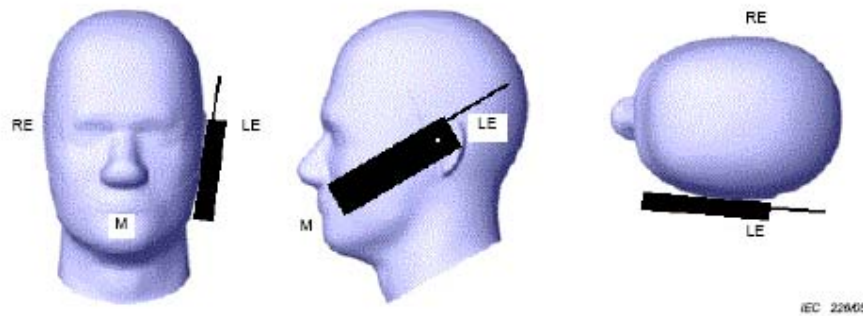

7.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes etc)

The SAR was measured at one test channel for each band of operation with the test sample operating at maximum power, as specified in section 2.3.

7.3 ARPANSA RF Exposure Limits for ACMA (Australia) and EN 50360

Table: SAR Exposure Limits

Spatial Peak SAR Limits For	
Head and Partial-Body:	2.0 mW/g (averaged over any 10g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)
Spatial Average SAR Limits For	
Whole Body:	0.08 mW/g



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

8.0 SAR EVALUATION RESULTS

The SAR values averaged over 10 g tissue masses were determined for the sample device for the Left and Right ear configurations of the phantom and the results are given in the tables below.

The plots with the corresponding SAR distributions are contained in Appendix B of this report.

Table: SAR Measurement Results – UMTS Band 5 (850 MHz) Samsung Galaxy S7

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (10g) mW/g	Drift (dB)	ϵ_r (target 40.0 \pm 5% 38.0 to 42.0)	σ (target 1.40 \pm 5% 1.33 to 1.47)	Reduction of SAR (%)
Touch Left with Lif3 Chip 19-04-16	1	WCDMA - UMTS	4183	836.6	0.0226	-0.07	42.2	0.8896	79.8
Touch Left No Chip 19-04-16	2	WCDMA - UMTS	4183	836.6	0.112	0.03	42.2	0.8896	-
Touch Right with Lif3 Chip 19-04-16	3	WCDMA - UMTS	4183	836.6	0.0362	-0.08	42.2	0.8896	77.8
Touch Right No Chip 19-04-16	4	WCDMA - UMTS	4183	836.6	0.163	0.02	42.2	0.8896	-
System Check 19-04-16	5	CW	1	900	1.73	0.03	41.41	0.9497	-

Note: The uncertainty of the system ($\pm 22.89\%$) has not been added to the result.

Table: SAR Measurement Results – UMTS Band 2 (1880 MHz) Samsung Galaxy S7

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (10g) mW/g	Drift (dB)	ϵ_r (target 41.5 \pm 5% 39.4 to 43.6)	σ (target 0.90 \pm 5% 0.86 to 0.95)	Reduction of SAR (%)
Touch Left with Lif3 Chip 18-04-16	6	WCDMA - UMTS	9400	1880	0.00915	-0.1	38.87	1.42	90.1
Touch Left No Chip 18-04-16	7	WCDMA - UMTS	9400	1880	0.092	0.02	38.87	1.42	-
Touch Right with Lif3 Chip 18-04-16	8	WCDMA - UMTS	9400	1880	0.0126	-0.11	38.87	1.42	78.3
Touch Right No Chip 18-04-16	9	WCDMA - UMTS	9400	1880	0.058	0.17	38.87	1.42	-
System Check 1800 MHz 18-04-16	10	System Check	1	1800	4.67	0.02	39.13	1.368	-

Note: The uncertainty of the system ($\pm 22.89\%$) has not been added to the result.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Table: SAR Measurement Results – UMTS Band 5 (850 MHz) Samsung Galaxy S7 Edge

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (10g) mW/g	Drift (dB)	ϵ_r (target 40.0 \pm 5% 38.0 to 42.0)	σ (target 1.40 \pm 5% 1.33 to 1.47)	Reduction of SAR (%)
Touch Left with Lif3 Chip 15-04-16	11	WCDMA - UMTS	4183	836.6	0.0367	-0.02	40.72	0.8713	66.3
Touch Left 15-04-16 No Chip	12	WCDMA - UMTS	4183	836.6	0.109	-0.12	40.72	0.8713	-
Touch Right with Lif3 Chip 15-04-16	13	WCDMA - UMTS	4183	836.6	0.0604	0.02	40.72	0.8713	64.5
Touch Right 15-04-16 No Chip	14	WCDMA - UMTS	4183	836.6	0.17	-0.04	40.72	0.8713	-

Note: The uncertainty of the system ($\pm 22.89\%$) has not been added to the result.

Table: SAR Measurement Results – UMTS Band 2 (1880 MHz) Samsung Galaxy S7 Edge

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (10g) mW/g	Drift (dB)	ϵ_r (target 41.5 \pm 5% 39.4 to 43.6)	σ (target 0.90 \pm 5% 0.86 to 0.95)	Reduction of SAR (%)
Touch Left with Lif3 Chip 15-04-16	15	WCDMA - UMTS	9400	1880	0.00971	0.12	38.87	1.42	80.7
Touch Left 15-04-16 No Chip	16	WCDMA - UMTS	9400	1880	0.0504	-0.03	38.87	1.42	-
Touch Right with Lif3 Chip 15-04-16	17	WCDMA - UMTS	9400	1880	0.00502	0.03	38.87	1.42	88.8
Touch Right 15-04-16 No Chip	18	WCDMA - UMTS	9400	1880	0.045	-0.14	38.87	1.42	-
System Check 1800 MHz 18-04-16	19	System Check	1	1800	4.67	0.02	39.13	1.368	-

Note: The uncertainty of the system ($\pm 22.89\%$) has not been added to the result.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

9.0 RESULTS STATEMENT

The Cellsafe Lif3 for Samsung Galaxy S7 series mobile phone, type: Samsung Galaxy S7, Galaxy S7 Edge was tested on behalf of Cellsafe Pty Ltd. Cellsafe Lif3 device was found to reduce SAR in the configurations described in this report by 66.3% to 90.1%.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX A1 Test Sample Photographs

Photograph Number 01. DUT Samsung Galaxy S7



Photograph Number 02. DUT Samsung Galaxy S7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX A2 Test Sample Photographs

Photograph Number 03. DUT Samsung Galaxy S7 Edge



Photograph Number 04. DUT Samsung Galaxy S7 Edge



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX A3 Test Sample Photographs

Photograph Number 05. Touch Left Position Samsung Galaxy S7



Photograph Number 06. Touch Left Position Samsung Galaxy S7




Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.


This document shall not be reproduced except in full.

APPENDIX A4 Test Sample Photographs

Photograph Number 07. Touch Right Position Samsung Galaxy S7

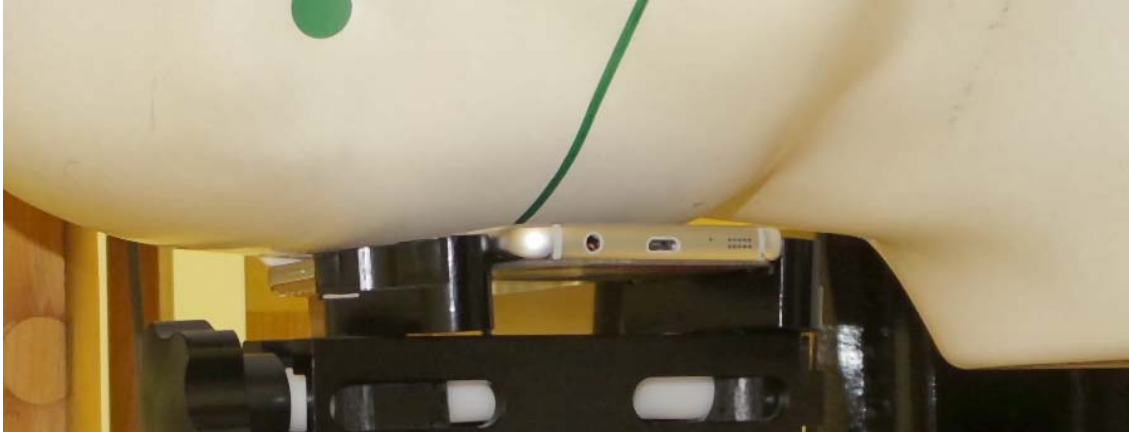

Photograph Number 08. Touch Right Position Samsung Galaxy S7

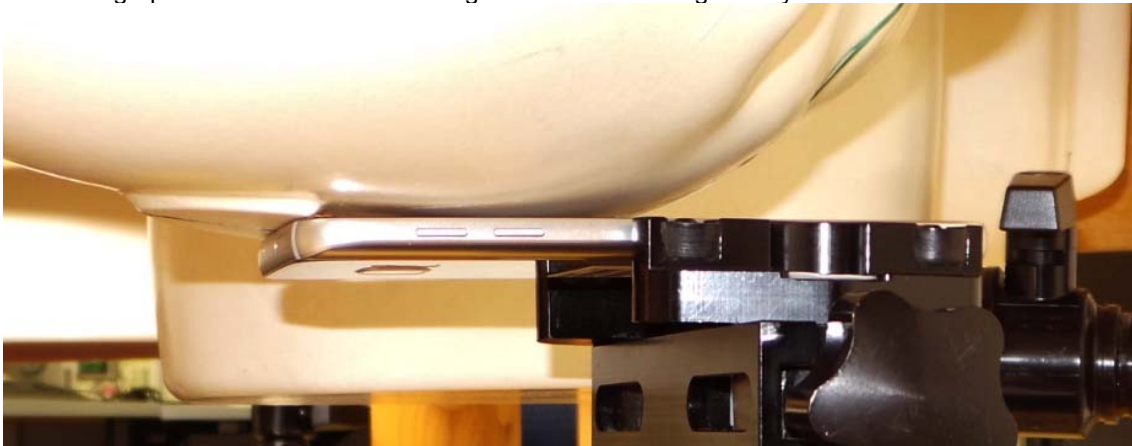


Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.


This document shall not be reproduced except in full.

APPENDIX A5 TEST SETUP PHOTOGRAPHS

Photograph Number 09. Touch Left Position Samsung Galaxy S7 Edge

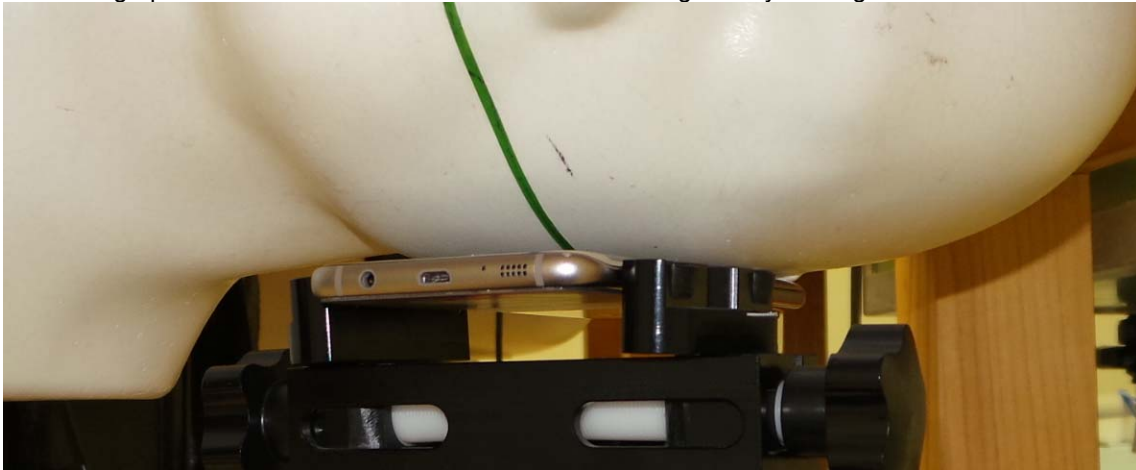

Photograph Number 10. Touch Left Position Samsung Galaxy S7 Edge

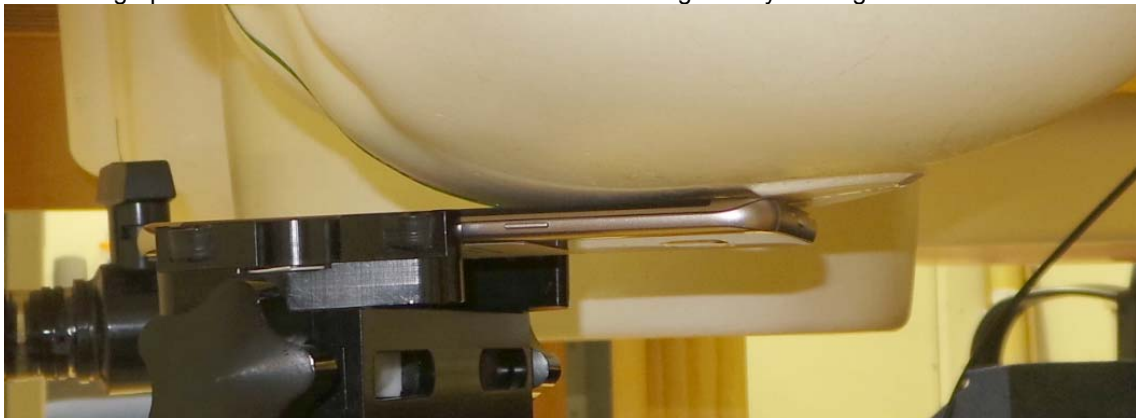


Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX A6 Test Setup Photographs

Photograph Number 11. Touch Right Position Samsung Galaxy S7 Edge

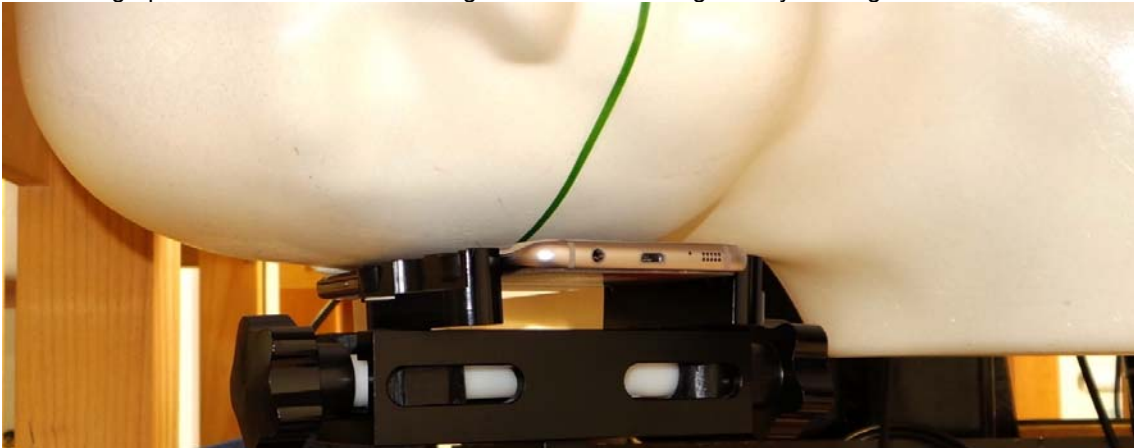

Photograph Number 12. Touch Right Position Samsung Galaxy S7 Edge



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX B Plots Of The SAR Measurements



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 850 MHz 3G EN.da52:0

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Left 19-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.2$; $\rho = 1000.0$ g/cm³

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 19-04-16/Channel 4183 Test with Cellsafe Lif3/Area Scan (131x71x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.033 W/kg**Touch Left 19-04-16/Channel 4183 Test with Cellsafe Lif3/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 4.888 V/m; **Power Drift = - 0.07 dB****Averaged SAR: SAR(1g) = 0.033 W/kg; SAR(10g) = 0.023 W/kg**

Maximum value of SAR (interpolated) = 0.044 W/kg

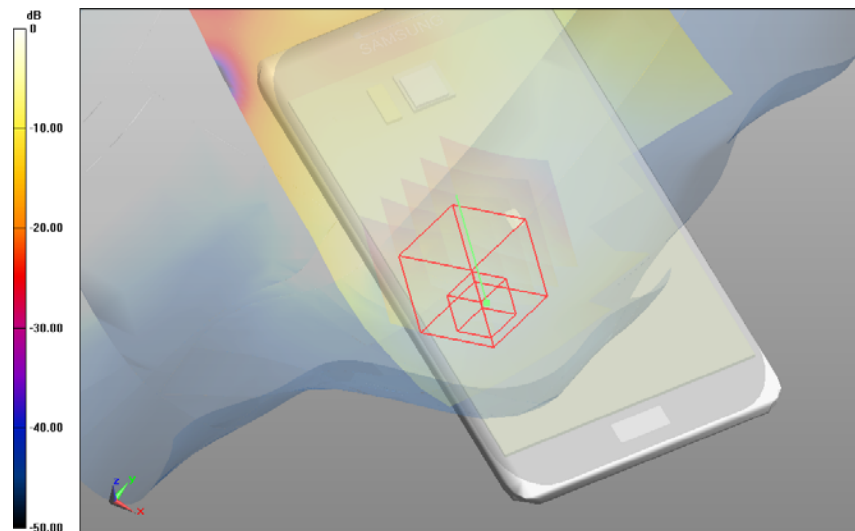

0 dB = 0.0328 W/kg = -14.84 dBW/kg

SAR Measurement Plot 1



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 850 MHz 3G EN.da52:0

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Left 19-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.2$; $\rho = 1000.0$ g/cm³

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 19-04-16/Channel 4183 Test without chip/Area Scan (131x71x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.156 W/kg**Touch Left 19-04-16/Channel 4183 Test without chip/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.340 V/m; **Power Drift = 0.03 dB****Averaged SAR: SAR(1g) = 0.141 W/kg; SAR(10g) = 0.112 W/kg**

Maximum value of SAR (interpolated) = 0.163 W/kg

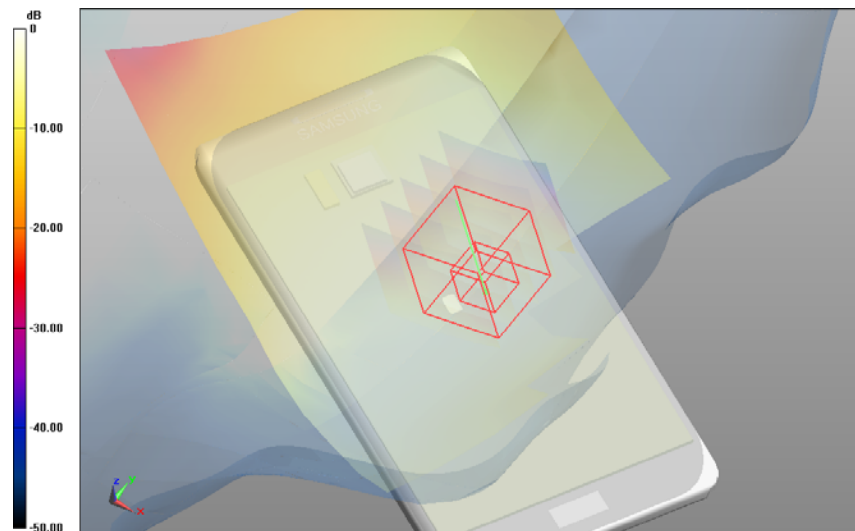

0 dB = 0.156 W/kg = -8.07 dBW/kg

SAR Measurement Plot 2



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 850 MHz 3G EN.da52:1

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Right 19-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.2$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 19-04-16/Channel 4183 Test with Cellsafe Lif3/Area Scan (131x71x1): Interpolated grid:

dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.048 W/kg

Touch Right 19-04-16/Channel 4183 Test with Cellsafe Lif3/Zoom Scan (21x21x36)/Cube 0:Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.460 V/m; **Power Drift = -****0.08 dB****Averaged SAR: SAR(1g) = 0.048 W/kg; SAR(10g) = 0.036 W/kg**

Maximum value of SAR (interpolated) = 0.056 W/kg

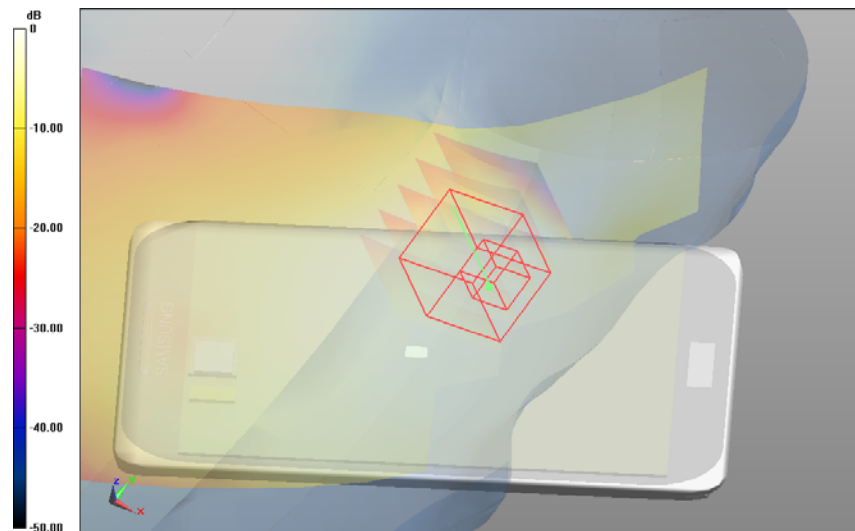

0 dB = 0.0481 W/kg = -13.18 dBW/kg

SAR Measurement Plot 3



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 850 MHz 3G EN.da52:1

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Right 19-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.2$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 19-04-16/Channel 4183 Test without chip/Area Scan (131x71x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.216 W/kg**Touch Right 19-04-16/Channel 4183 Test without chip/Zoom Scan (26x26x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 14.991 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 0.210 W/kg; SAR(10g) = 0.163 W/kg**

Maximum value of SAR (interpolated) = 0.245 W/kg

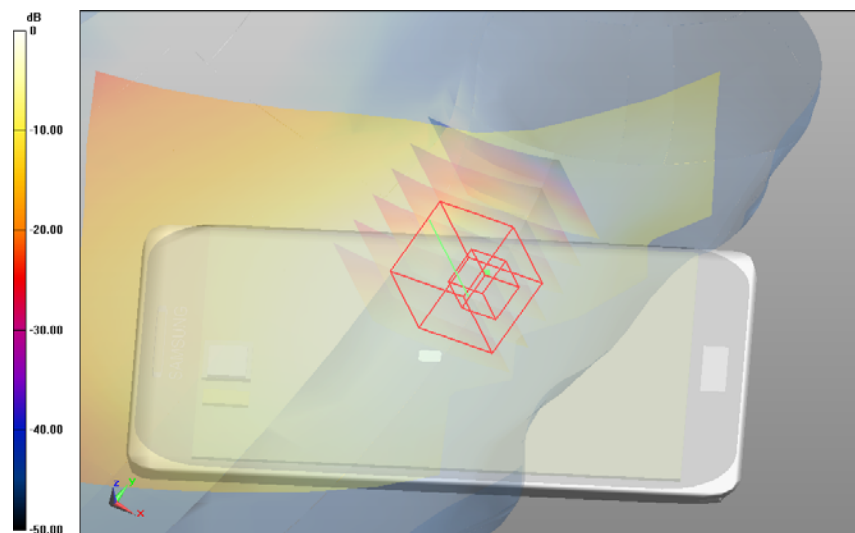

0 dB = 0.216 W/kg = -6.66 dBW/kg

SAR Measurement Plot 4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 850 MHz 3G EN.da52:2

DUT Name: Dipole 900 MHz, Type: DV900V2, Serial: 047**Configuration: System Check 19-04-16**

Communication System: 0 - CW; Communication System Band: 900 MHz; Frequency: 900.0 MHz;

Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=900$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 41.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 19-04-16/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;

Maximum value of SAR (interpolated) = 2.920 W/kg

System Check 19-04-16/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 56.600 V/m; **Power Drift = 0.03 dB****Averaged SAR: SAR(1g) = 2.670 W/kg; SAR(10g) = 1.730 W/kg**

Maximum value of SAR (interpolated) = 3.960 W/kg

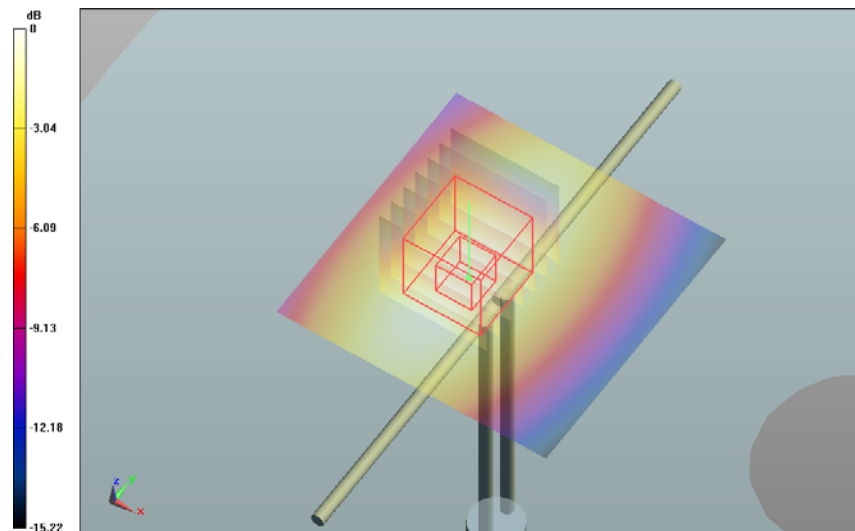

0 dB = 2.92 W/kg = 4.65 dBW/kg

SAR Measurement Plot 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 1900 MHz 3G.da52:0

DUT Name: Samsung Galaxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Left 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Area Scan (141x81x1):Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.017 W/kg**Touch Left 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Zoom Scan (26x21x36)/Cube****0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 2.925 V/m; **Power Drift = - 0.10 dB****Averaged SAR: SAR(1g) = 0.015 W/kg; SAR(10g) = 0.009 W/kg**

Maximum value of SAR (interpolated) = 0.023 W/kg

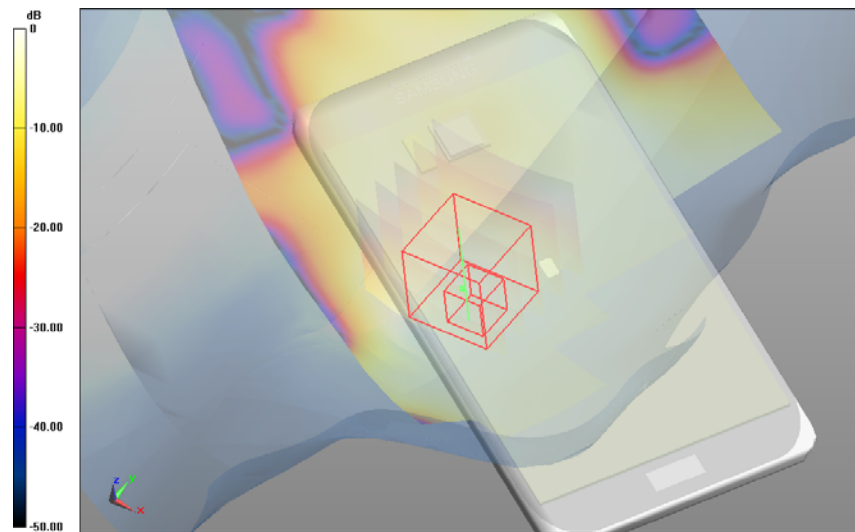

0 dB = 0.0165 W/kg = -17.83 dBW/kg

SAR Measurement Plot 6



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 1900 MHz 3G.da52:0

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Left 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 1900 MHz 18-04-16/Channel 9400 Test without chip/Area Scan (141x81x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.169 W/kg**Touch Left 1900 MHz 18-04-16/Channel 9400 Test without chip/Zoom Scan (26x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.244 V/m; **Power Drift =****0.02 dB****Averaged SAR: SAR(1g) = 0.142 W/kg; SAR(10g) = 0.092 W/kg**

Maximum value of SAR (interpolated) = 0.207 W/kg

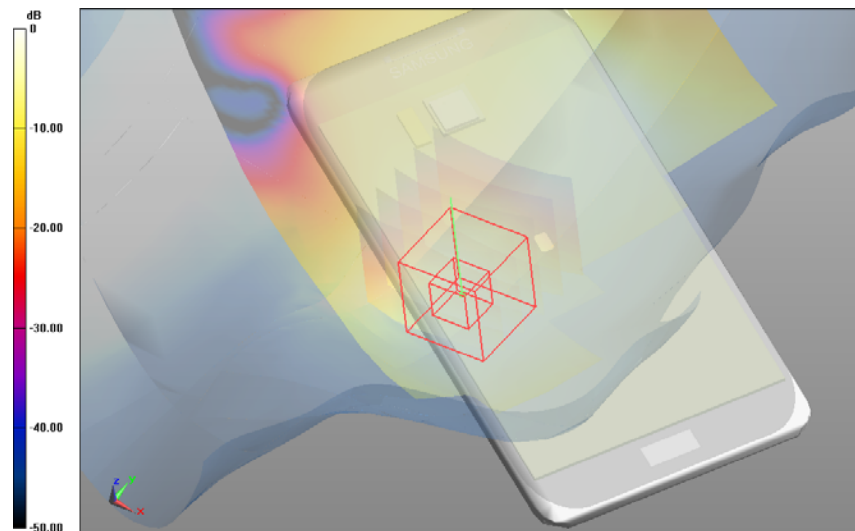

0 dB = 0.169 W/kg = -7.72 dBW/kg

SAR Measurement Plot 7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 1900 MHz 3G.da52:1

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Right 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Area Scan (141x81x1):Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.022 W/kg**Touch Right 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Zoom Scan (26x21x36)/Cube****0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 3.223 V/m; **Power Drift = -****0.11 dB****Averaged SAR: SAR(1g) = 0.020 W/kg; SAR(10g) = 0.013 W/kg**

Maximum value of SAR (interpolated) = 0.030 W/kg

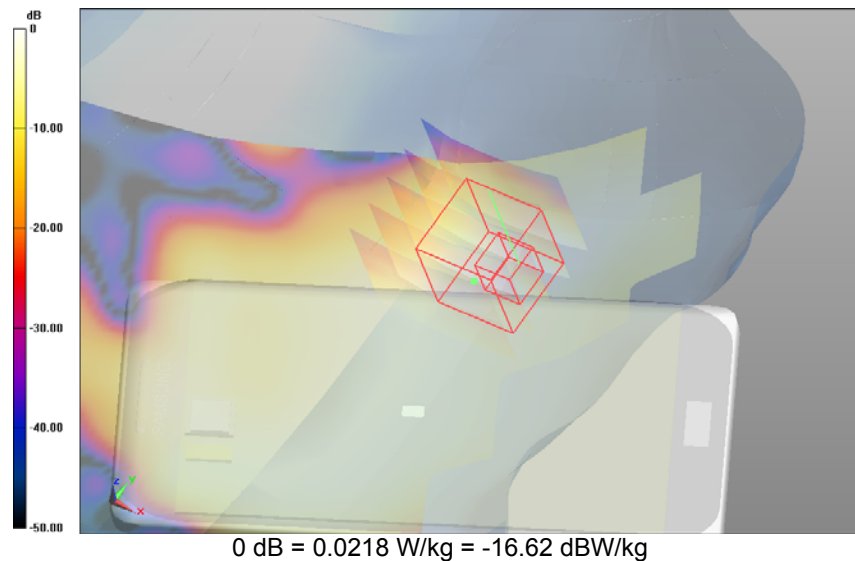

SAR Measurement Plot 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 1900 MHz 3G.da52:1

DUT Name: Samsung Galxy S7 Mobile Phone, Type: SM-G930F, Serial: R58H30DJD3V**Configuration: Touch Right 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 1900 MHz 18-04-16/Channel 9400 Test without chip/Area Scan (141x81x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.104 W/kg**Touch Right 1900 MHz 18-04-16/Channel 9400 Test without chip/Zoom Scan (26x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 6.676 V/m; **Power Drift =****0.17 dB****Averaged SAR: SAR(1g) = 0.093 W/kg; SAR(10g) = 0.058 W/kg**

Maximum value of SAR (interpolated) = 0.140 W/kg

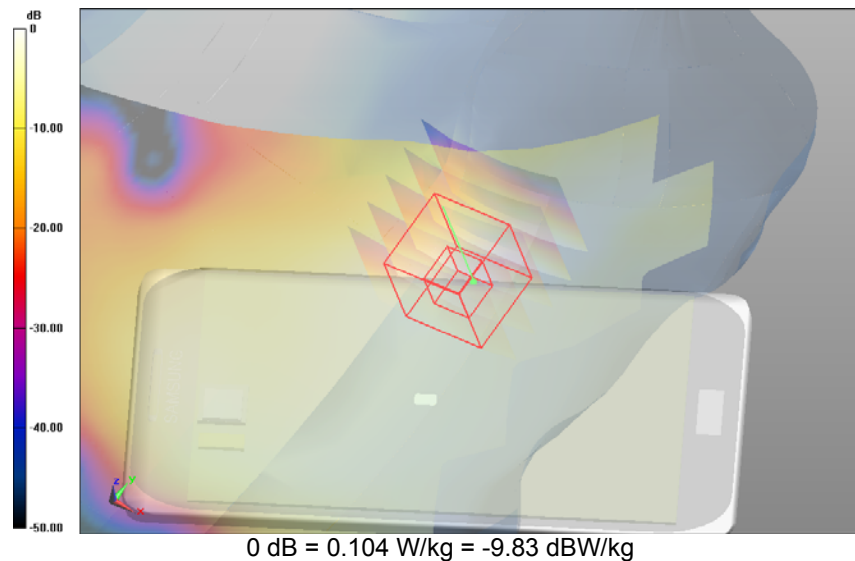

SAR Measurement Plot 9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 1900 MHz 3G.da52:2

DUT Name: Dipole 1800 MHz, Type: DV1800V2, Serial: 242**Configuration: System Check 1800 MHz 18-04-16**

Communication System: 0 - System Check; Communication System Band: 1800 MHz; Frequency: 1800 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1800.8$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 1800 MHz 18-04-16/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 10.700 W/kg**System Check 1800 MHz 18-04-16/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0:** Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 87.925 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 8.790 W/kg; SAR(10g) = 4.670 W/kg**

Maximum value of SAR (interpolated) = 15.100 W/kg

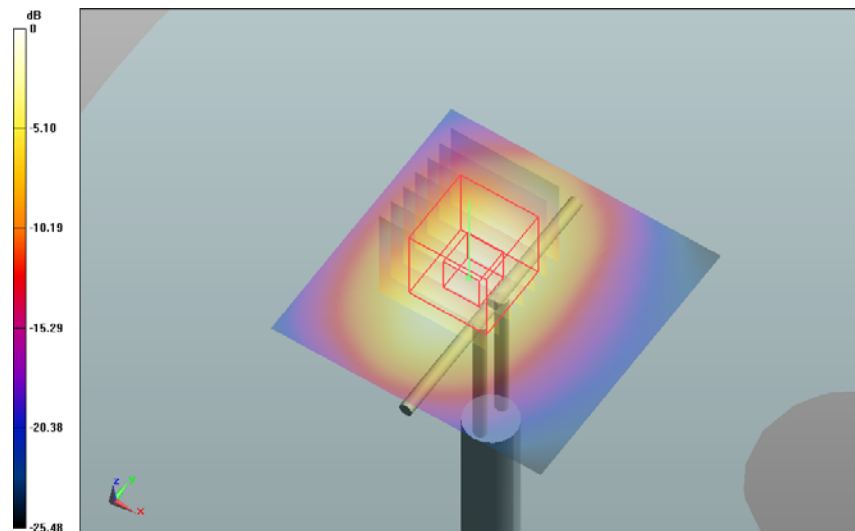

0 dB = 10.7 W/kg = 10.29 dBW/kg

SAR Measurement Plot 10



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 850 MHz 3G EN.da52:0

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Left 15-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.7$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 15-04-16/Channel 4183 Test with Cellsafe Lif3/Area Scan (131x71x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.052 W/kg**Touch Left 15-04-16/Channel 4183 Test with Cellsafe Lif3/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.017 V/m; **Power Drift = -****0.02 dB****Averaged SAR: SAR(1g) = 0.046 W/kg; SAR(10g) = 0.037 W/kg**

Maximum value of SAR (interpolated) = 0.055 W/kg

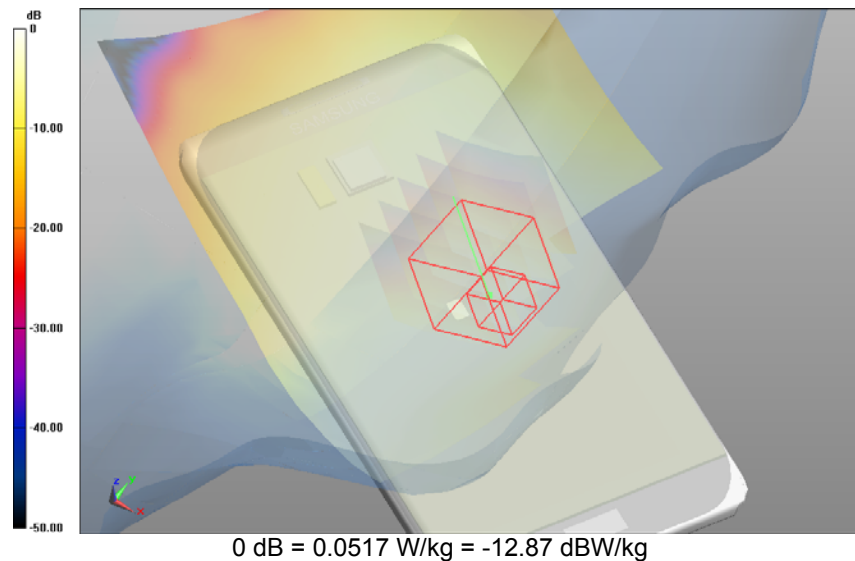

SAR Measurement Plot 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 850 MHz 3G EN.da52:0

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Left 15-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.7$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 15-04-16/Channel 4183 Test without chip/Area Scan (131x71x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.152 W/kg**Touch Left 15-04-16/Channel 4183 Test without chip/Zoom Scan (26x26x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 11.032 V/m; **Power Drift = -0.12 dB****Averaged SAR: SAR(1g) = 0.138 W/kg; SAR(10g) = 0.109 W/kg**

Maximum value of SAR (interpolated) = 0.168 W/kg

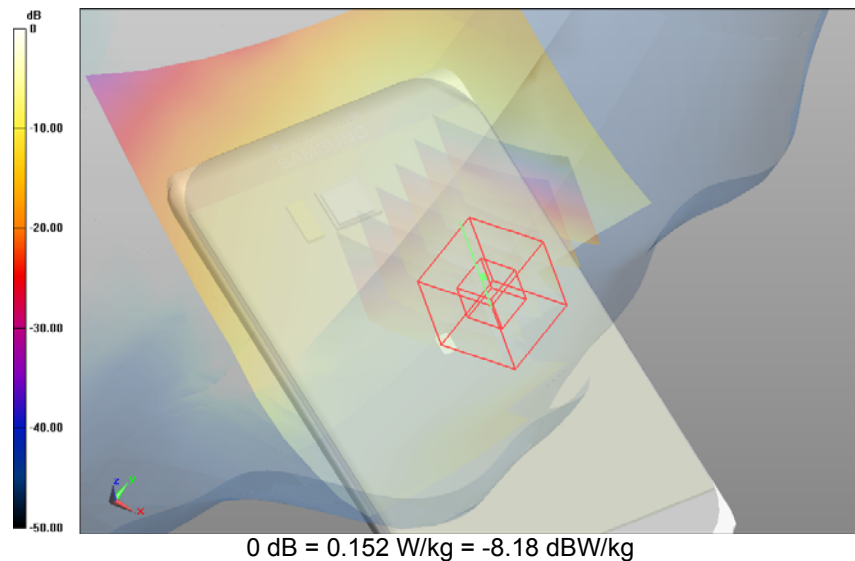

SAR Measurement Plot 12



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 850 MHz 3G EN.da52:1

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Right 15-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.7$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 15-04-16/Channel 4183 Test with Cellsafe Lif3/Area Scan (131x71x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.078 W/kg**Touch Right 15-04-16/Channel 4183 Test with Cellsafe Lif3/Zoom Scan (26x26x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 8.880 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 0.078 W/kg; SAR(10g) = 0.060 W/kg**

Maximum value of SAR (interpolated) = 0.091 W/kg

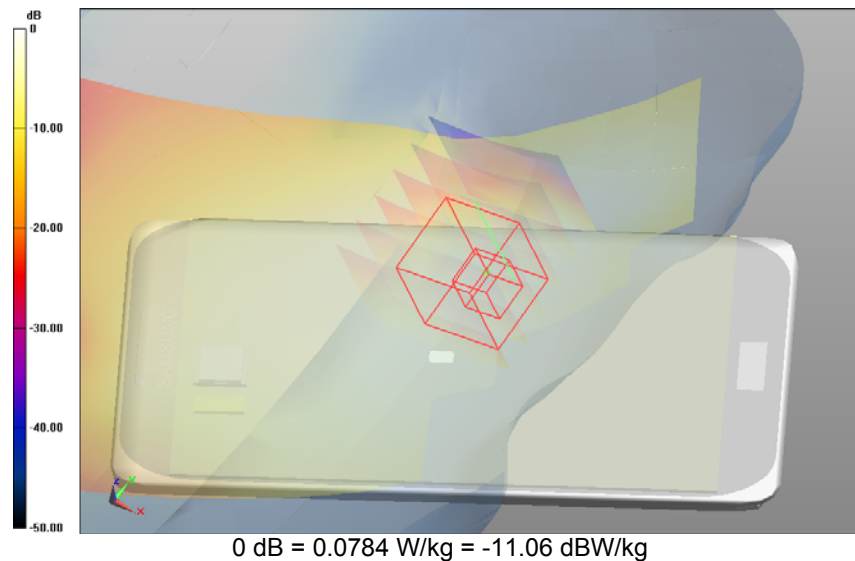

SAR Measurement Plot 13



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 850 MHz 3G EN.da52:1

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Right 15-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 5 850 MHz;

Frequency: 836.6 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=836.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 40.7$; $\rho = 1000.0$ g/cm³

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.08,6.08,6.08); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 12; Type: SAM 12; Serial: 1060

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 15-04-16/Channel 4183 Test without chip/Area Scan (131x71x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.229 W/kg**Touch Right 15-04-16/Channel 4183 Test without chip/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 14.525 V/m; **Power Drift = -0.04 dB****Averaged SAR: SAR(1g) = 0.221 W/kg; SAR(10g) = 0.170 W/kg**

Maximum value of SAR (interpolated) = 0.263 W/kg

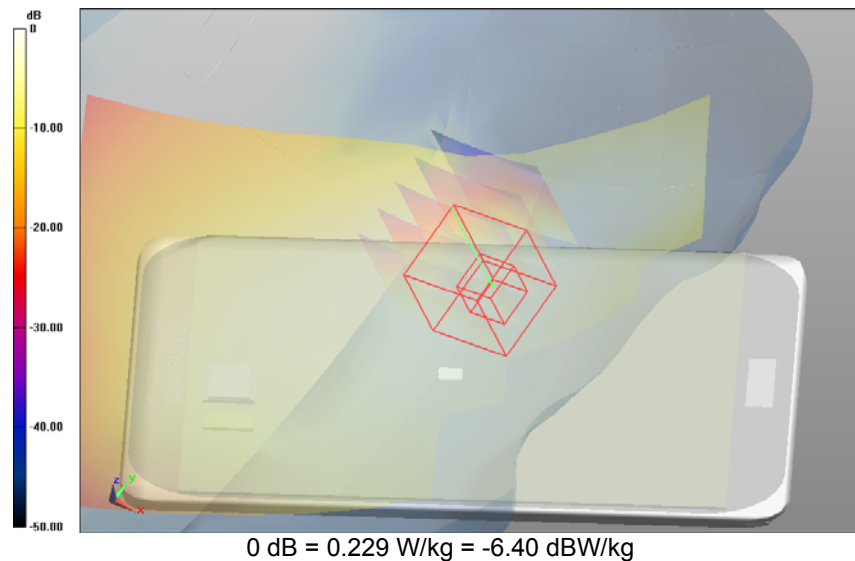

SAR Measurement Plot 14

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 1900 MHz 3G.da52:0

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Left 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 7/12/2015
Phantom: SAM 22; Type: SAM 22; Serial: 1260
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Area Scan (141x81x1):


Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.019 W/kg

Touch Left 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 2.072 V/m; **Power Drift = 0.12 dB**

Averaged SAR: SAR(1g) = 0.016 W/kg; SAR(10g) = 0.010 W/kg

Maximum value of SAR (interpolated) = 0.025 W/kg

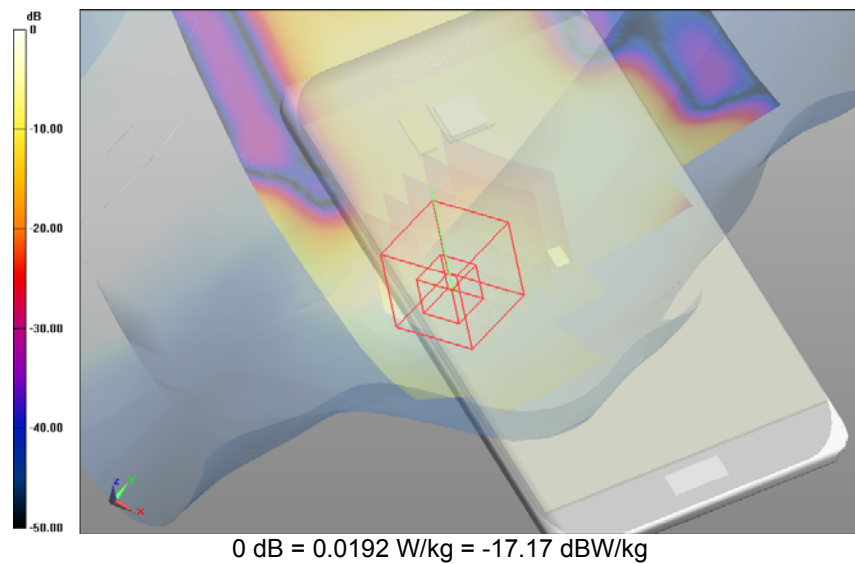

SAR Measurement Plot 15



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 1900 MHz 3G.da52:0

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Left 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Left Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Left 1900 MHz 18-04-16/Channel 9400 Test without chip/Area Scan (141x81x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.097 W/kg**Touch Left 1900 MHz 18-04-16/Channel 9400 Test without chip/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 5.462 V/m; **Power Drift = -****0.03 dB****Averaged SAR: SAR(1g) = 0.079 W/kg; SAR(10g) = 0.050 W/kg**

Maximum value of SAR (interpolated) = 0.114 W/kg

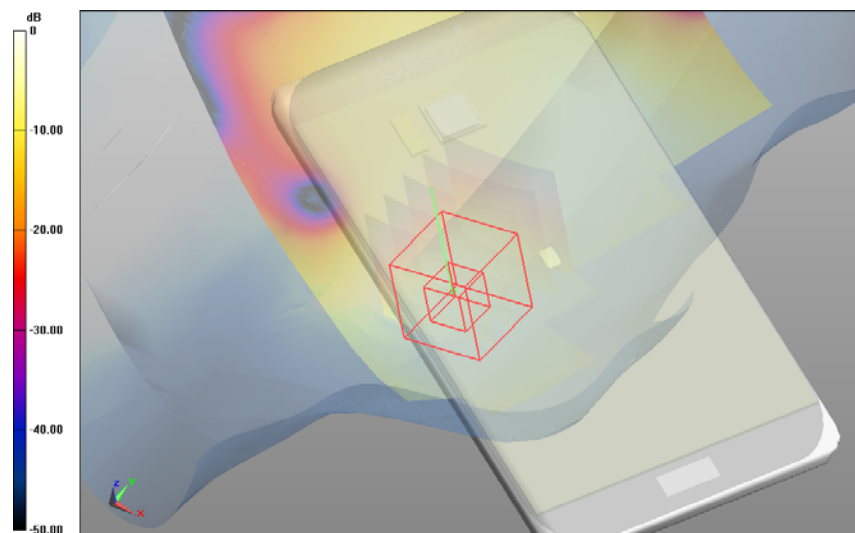

0 dB = 0.0968 W/kg = -10.14 dBW/kg

SAR Measurement Plot 16



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 1900 MHz 3G.da52:1

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Right 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Area Scan (141x81x1):Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.017 W/kg**Touch Right 1900 MHz 18-04-16/Channel 9400 Test with Cellsafe Lif3/Zoom Scan (21x21x36)/Cube****0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 2.226 V/m; **Power Drift =****0.03 dB****Averaged SAR: SAR(1g) = 0.008 W/kg; SAR(10g) = 0.005 W/kg**

Maximum value of SAR (interpolated) = 0.012 W/kg

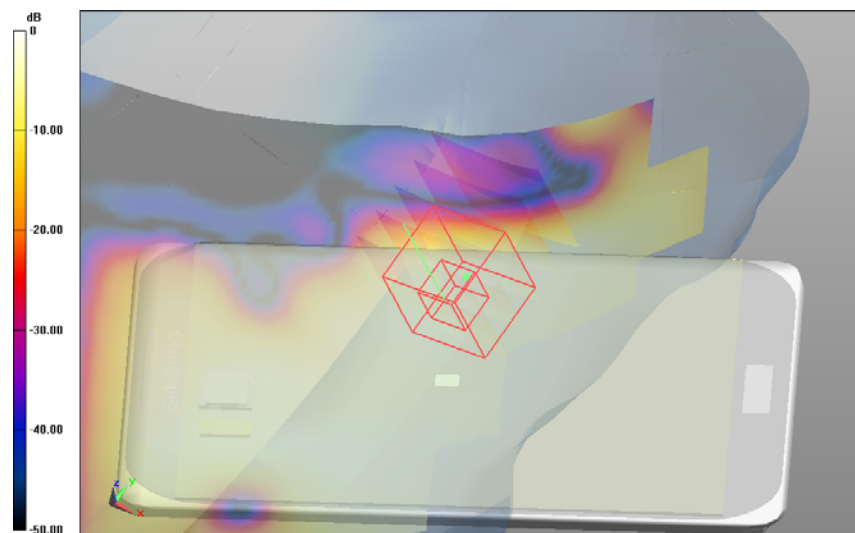

0 dB = 0.0173 W/kg = -17.62 dBW/kg

SAR Measurement Plot 17



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 1900 MHz 3G.da52:1

DUT Name: Samsung Galxy S7 Edge Mobile Phone, Type: SM-G9350, Serial: R28H32JAVSP**Configuration: Touch Right 1900 MHz 18-04-16**

Communication System: 0 - WCDMA - UMTS; Communication System Band: Band 2 1850 MHz;

Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1879.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Right Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Touch Right 1900 MHz 18-04-16/Channel 9400 Test without chip/Area Scan (141x81x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.081 W/kg**Touch Right 1900 MHz 18-04-16/Channel 9400 Test without chip/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 6.671 V/m; **Power Drift = -****0.14 dB****Averaged SAR: SAR(1g) = 0.071 W/kg; SAR(10g) = 0.045 W/kg**

Maximum value of SAR (interpolated) = 0.100 W/kg

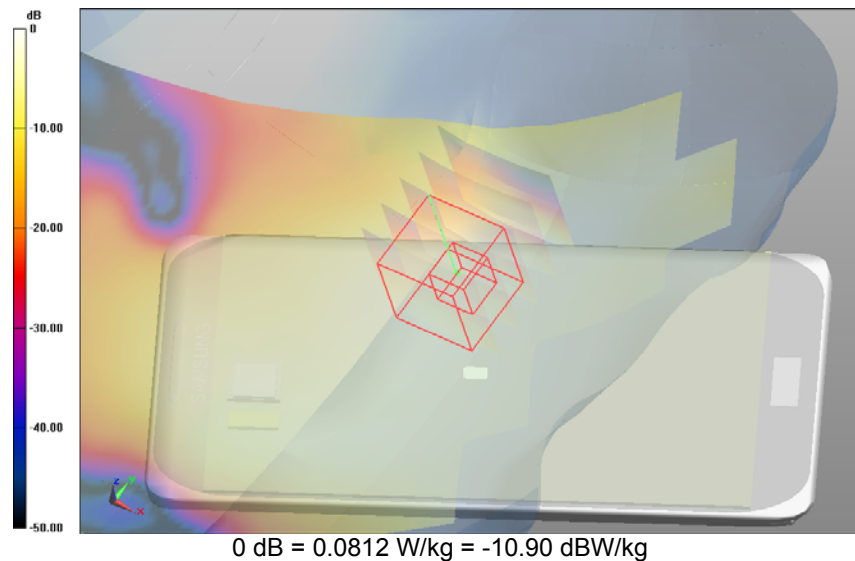

SAR Measurement Plot 18



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M160351R1 Samsung Galaxy S7 Edge 1900 MHz 3G.da52:2

DUT Name: Dipole 1800 MHz, Type: DV1800V2, Serial: 242**Configuration: System Check 1800 MHz 18-04-16**

Communication System: 0 - System Check; Communication System Band: 1800 MHz; Frequency: 1800 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1800.8$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (5.12,5.12,5.12); Calibrated: 10/12/2015;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 7/12/2015

Phantom: SAM 22; Type: SAM 22; Serial: 1260

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 1800 MHz 18-04-16/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 10.700 W/kg**System Check 1800 MHz 18-04-16/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0:** Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 87.925 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 8.790 W/kg; SAR(10g) = 4.670 W/kg**

Maximum value of SAR (interpolated) = 15.100 W/kg

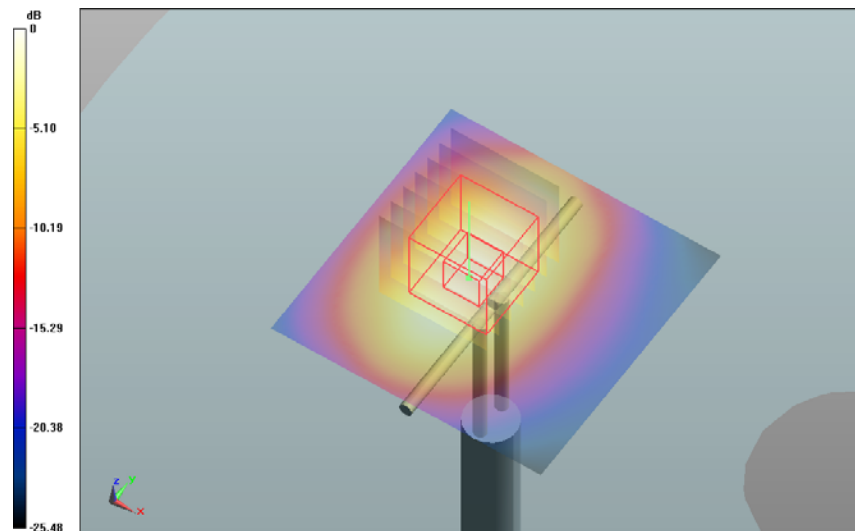

0 dB = 10.7 W/kg = 10.29 dBW/kg

SAR Measurement Plot 19



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX C DESCRIPTION OF SAR MEASUREMENT SYSTEM

Probe Positioning System

The measurements were performed with the state of the art automated near-field scanning system **DASY5 Version 52** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than ± 0.02 mm. The DASY5 fully complies with the IEEE 1528 and EN62209 SAR measurement requirements.

E-Field Probe Type and Performance

The SAR measurements were conducted with the dosimetric probe ET3DV6 was used (manufactured by SPEAG). The SAR probes are designed in the classical triangular configuration and optimised for dosimetric evaluation. The probe has been calibrated and found to be accurate to better than ± 0.25 dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom.

Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is 200 M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

Device Holder for DASY5

The DASY5 device holder supplied by SPEAG is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The rotation centres for both scales is the ear opening. Thus the device needs no repositioning when changing the angles.

The DASY5 device holder is made of low-loss material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, to reduce the influence on the clamp on the test results.

Refer to Appendix A for photograph of device positioning.

Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of at least 15cm with a tolerance of ± 0.5 cm.

Phantom Properties (Size, Shape, Shell Thickness, Tissue Material Properties)

The phantom used during the SAR testing and validation was the "SAM" phantom from SPEAG. The phantom thickness is 2.0mm \pm 0.2 mm and was filled with the required tissue simulating liquid.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

The dielectric parameters of the simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The target dielectric parameters are shown in the following table.

Table: Target Simulating Liquid Dielectric Values UMTS Bands

Band	UMTS Band 2			
Frequency (MHz)	1852.4	40.0 \pm 5% (38.0 to 42.0)	1.40 \pm 5% (1.33 to 1.47)	1000
	1880	40.0 \pm 5% (38.0 to 42.0)	1.40 \pm 5% (1.33 to 1.47)	1000
	1907.6	40.0 \pm 5% (38.0 to 42.0)	1.40 \pm 5% (1.33 to 1.47)	1000
Band	UMTS Band 5			
Frequency (MHz)	826.4	41.5 \pm 5% (39.4 to 43.6)	0.90 \pm 5% (0.86 to 0.95)	1000
	836.6	41.5 \pm 5% (39.4 to 43.6)	0.90 \pm 5% (0.86 to 0.95)	1000
	846.6	41.5 \pm 5% (39.4 to 43.6)	0.90 \pm 5% (0.86 to 0.95)	1000

Note: The liquid parameters were within the required tolerances of \pm 5%.

Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

Table: Tissue Type: @ 850/900MHz
Volume of Liquid: 30 Litres

Approximate Composition	% By Weight
Distilled Water	41.05
Salt	1.35
Sugar	56.5
HEC	1.0
Bactericide	0.1

Table: Tissue Type: @ 1800/1950MHz
Volume of Liquid: 30 Litres

Approximate Composition	% By Weight
Distilled Water	61.17
Salt	0.31
Bactericide	0.29
Triton X-100	38.23



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

APPENDIX D CALIBRATION DOCUMENTS

1. ET3DV6 SN: 1380 Probe Calibration Certificate
2. SN: 047 D900V2 Dipole Calibration Certificate
3. SN: 242 D1800V2 Dipole Calibration Certificate
4. SN: 442 DAE3 Data Acquisition Electronics Calibration Certificate



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **EMC Technologies**

Certificate No: **ET3-1380_Dec15**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1380**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **December 10, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: December 10, 2015			

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1380_Dec15

Page 1 of 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below **ConvF**).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of **ConvF**.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Certificate No: ET3-1380_Dec15

Page 2 of 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6 – SN:1380

December 10, 2015

Probe ET3DV6

SN:1380

Manufactured: August 16, 1999
Calibrated: December 10, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Certificate No: ET3-1380_Dec15

Page 3 of 11



Accreditation No. 1292

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6- SN:1380

December 10, 2015

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1380**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V/m})^2$) ^A	1.65	1.59	1.69	$\pm 10.1 \%$
DCP (mV) ^B	96.4	95.6	96.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	250.1	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		227.8	
		Z	0.0	0.0	1.0		253.2	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6- SN:1380

December 10, 2015

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1380**Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
300	45.3	0.87	7.96	7.96	7.96	0.24	2.85	± 13.3 %
450	43.5	0.87	7.17	7.17	7.17	0.27	2.85	± 13.3 %
750	41.9	0.89	6.49	6.49	6.49	0.31	3.00	± 12.0 %
900	41.5	0.97	6.08	6.08	6.08	0.32	3.00	± 12.0 %
1640	40.3	1.29	5.35	5.35	5.35	0.69	2.25	± 12.0 %
1810	40.0	1.40	5.12	5.12	5.12	0.80	2.11	± 12.0 %
1950	40.0	1.40	4.94	4.94	4.94	0.80	2.07	± 12.0 %
2450	39.2	1.80	4.56	4.56	4.56	0.80	1.79	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6- SN:1380

December 10, 2015

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1380**Calibration Parameter Determined in Body Tissue Simulating Media**

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth (mm) ^G	Unc (k=2)
300	58.2	0.92	7.55	7.55	7.55	0.22	2.30	± 13.3 %
450	56.7	0.94	7.57	7.57	7.57	0.21	2.30	± 13.3 %
750	55.5	0.96	6.31	6.31	6.31	0.32	3.00	± 12.0 %
900	55.0	1.05	6.08	6.08	6.08	0.36	3.00	± 12.0 %
1810	53.3	1.52	4.73	4.73	4.73	0.80	2.21	± 12.0 %
1950	53.3	1.52	4.78	4.78	4.78	0.80	2.10	± 12.0 %
2450	52.7	1.95	4.18	4.18	4.18	0.90	0.90	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6- SN:1380

December 10, 2015

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

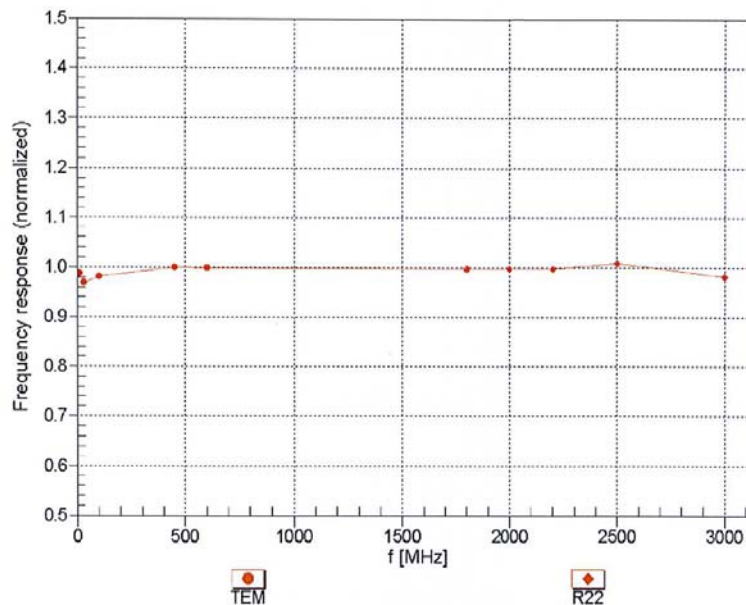
Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6- SN:1380



December 10, 2015

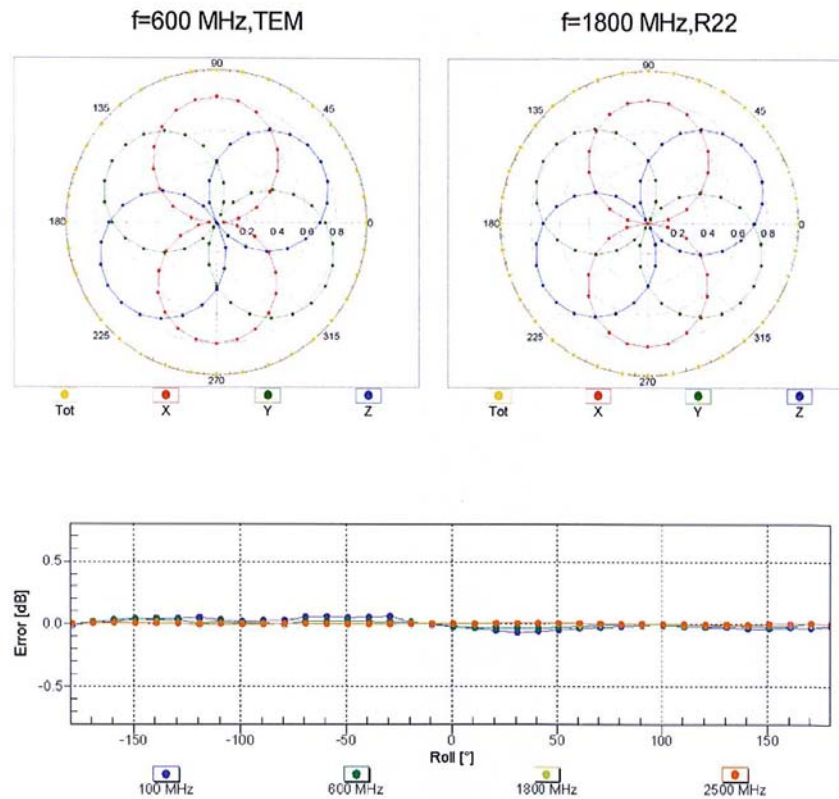Receiving Pattern (ϕ), $\theta = 0^\circ$ **Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)**

ET3DV6- SN:1380

December 10, 2015

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

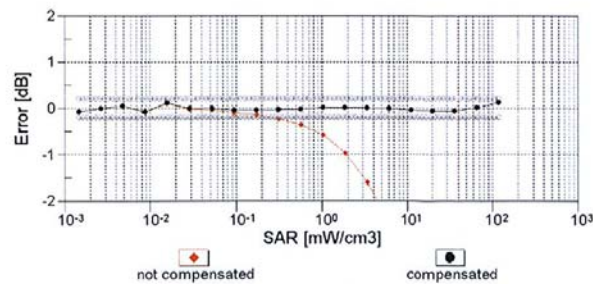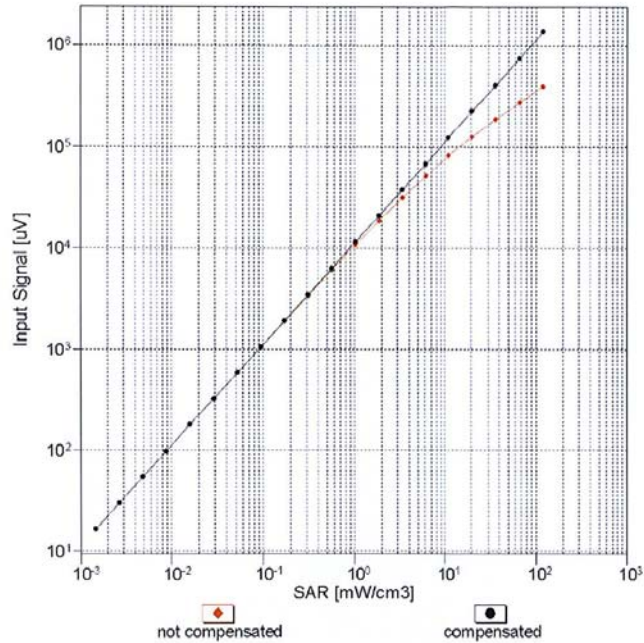Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.


ET3DV6- SN:1380

December 10, 2015

Conversion Factor Assessment

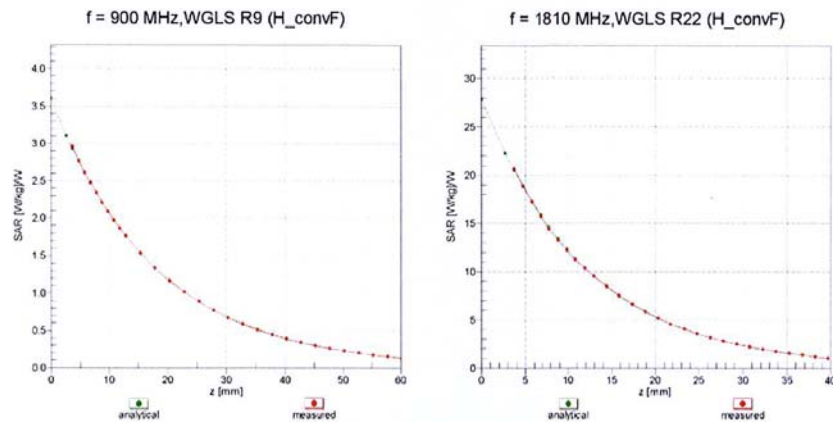

Deviation from Isotropy in Liquid

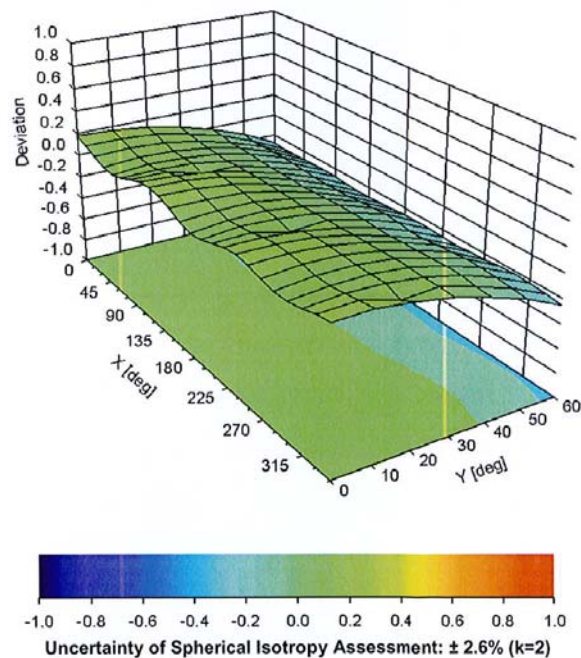Error (ϕ , θ), f = 900 MHz

Certificate No: ET3-1380_Dec15

Page 10 of 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

ET3DV6-- SN:1380

December 10, 2015

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1380**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-19.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm



Accreditation No. 1292

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **EMC Technologies**

Certificate No: **D900V2-047_Dec14**

CALIBRATION CERTIFICATE

Object **D900V2 - SN: 047**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **December 09, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Michael Weber **Function** Laboratory Technician

Signature

Approved by: **Name** Katja Pokovic **Function** Technical Manager

Issued: December 11, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D900V2-047_Dec14

Page 1 of 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.0 \pm 6 %	0.94 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	10.6 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.79 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.1 \pm 6 %	1.02 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	10.7 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.71 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.94 W/kg \pm 16.5 % (k=2)



Appendix (Additional assessments outside the scope of SCS108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.7 Ω - 4.6 $j\Omega$
Return Loss	- 26.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.9 Ω - 7.0 $j\Omega$
Return Loss	- 22.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.410 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 07, 1998



Accreditation No. 1292

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

DASY5 Validation Report for Head TSL

Date: 09.12.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 047

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.65 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.83 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

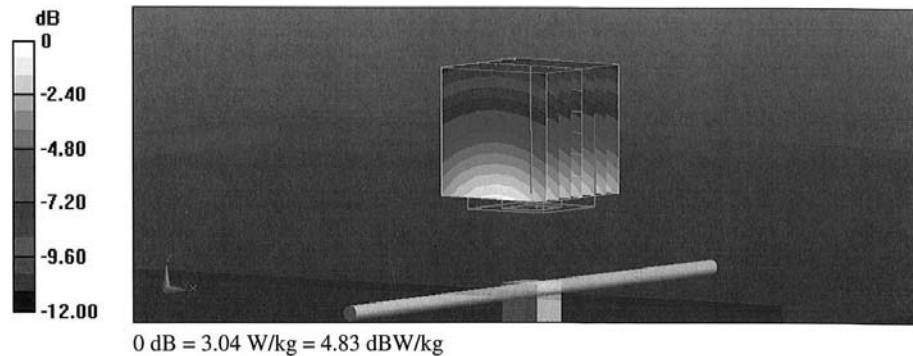

Impedance Measurement Plot for Head TSL

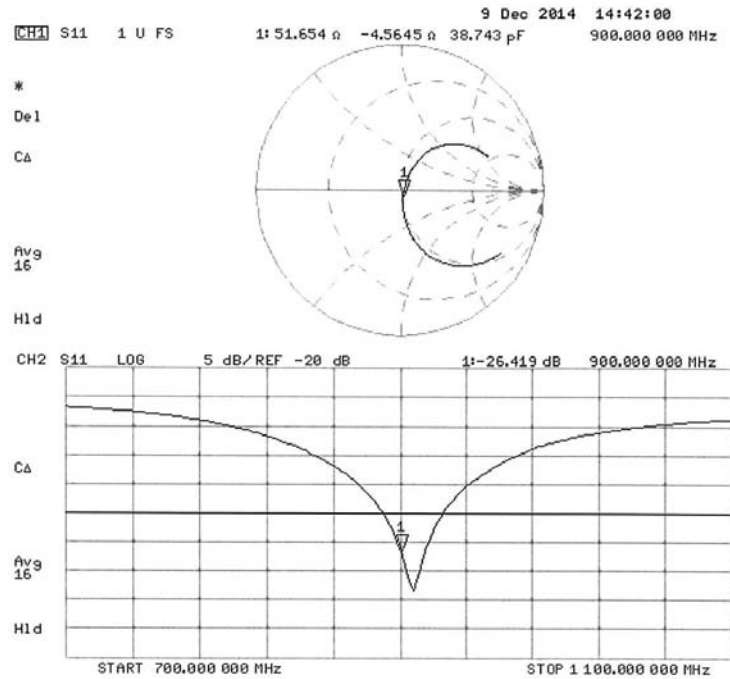

DASY5 Validation Report for Body TSL

Date: 09.12.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 047

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used: $f = 900$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.98, 5.98, 5.98); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.98 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.62 W/kg; SAR(10 g) = 1.71 W/kg

Maximum value of SAR (measured) = 3.06 W/kg

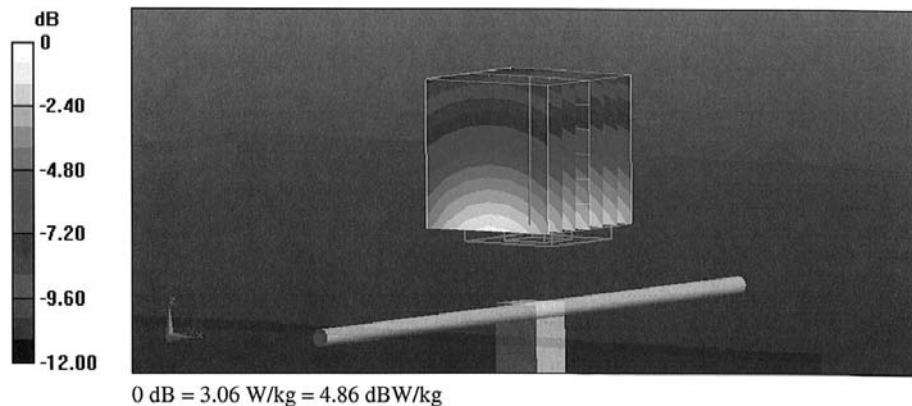

Impedance Measurement Plot for Body TSL

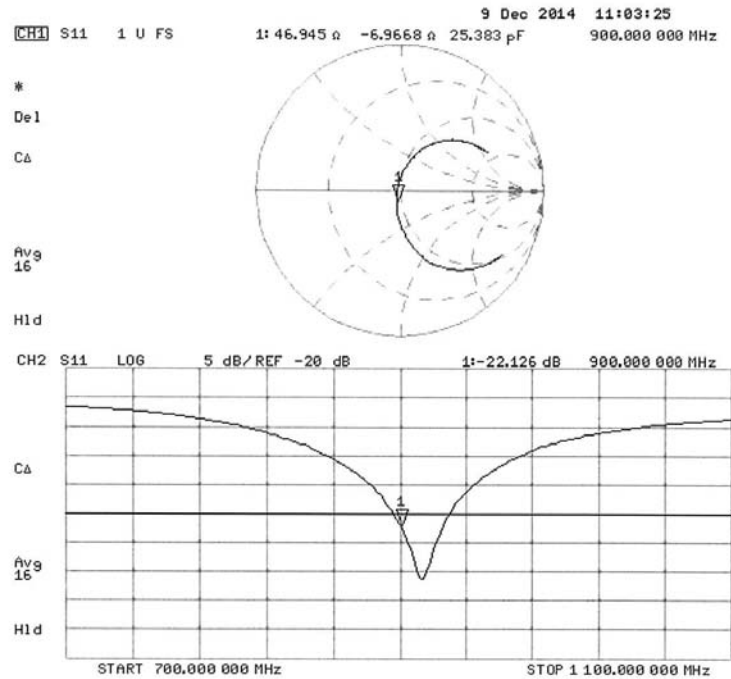

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **EMC Technologies**

Certificate No: **D1800V2-242_Dec14**

CALIBRATION CERTIFICATE

Object **D1800V2 - SN: 242**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **December 05, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: December 8, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1800V2-242_Dec14

Page 1 of 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Calibration Laboratory of
Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1800 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.0 \pm 6 %	1.41 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.73 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	38.5 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.1 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	51.9 \pm 6 %	1.53 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.64 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	38.2 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.2 W/kg \pm 16.5 % (k=2)



Appendix (Additional assessments outside the scope of SCS108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	47.6 Ω - 5.7 j Ω
Return Loss	- 24.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.3 Ω - 5.9 j Ω
Return Loss	- 21.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 10, 1998



Accreditation No. 1292

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

DASY5 Validation Report for Head TSL

Date: 05.12.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 242

Communication System: UID 0 - CW; Frequency: 1800 MHz

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.06 W/kg


Maximum value of SAR (measured) = 12.4 W/kg

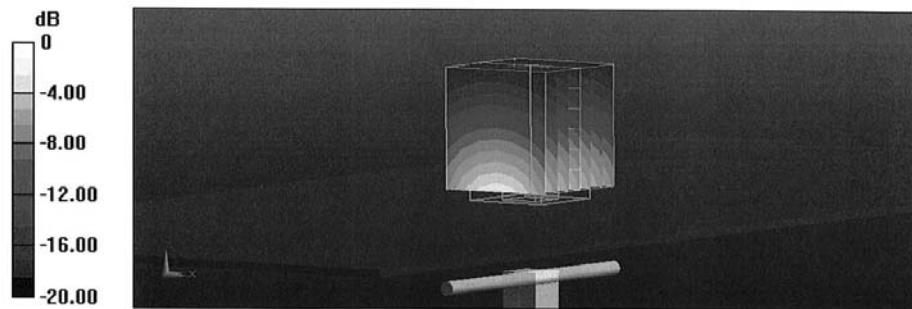

0 dB = 12.4 W/kg = 10.93 dBW/kg



Impedance Measurement Plot for Head TSL

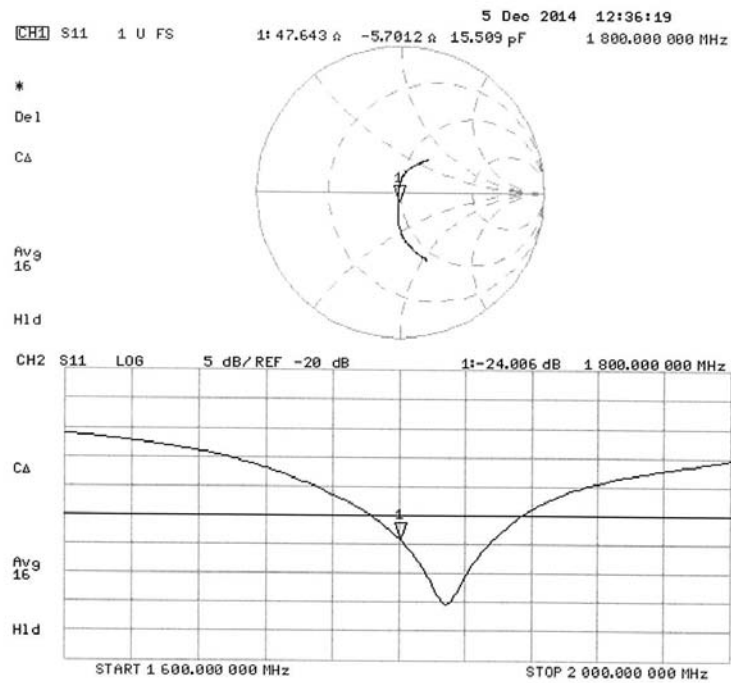

DASY5 Validation Report for Body TSL

Date: 05.12.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 242

Communication System: UID 0 - CW; Frequency: 1800 MHz

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.86, 4.86, 4.86); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 93.17 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.08 W/kg


Maximum value of SAR (measured) = 12.2 W/kg

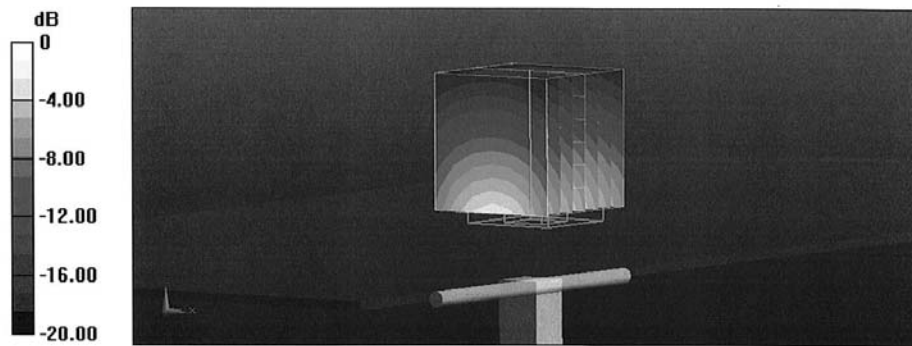

0 dB = 12.2 W/kg = 10.86 dBW/kg



Impedance Measurement Plot for Body TSL

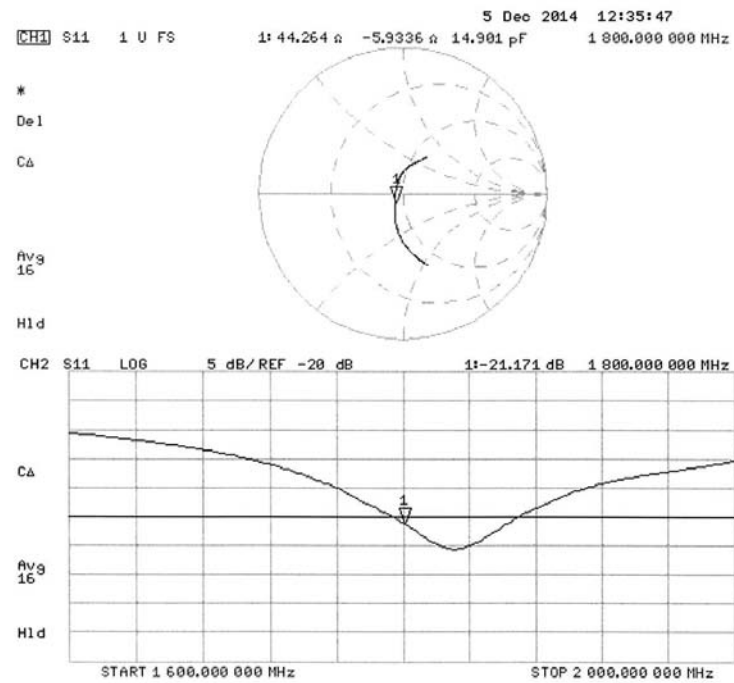

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **EMC Technologies**

Certificate No: **DAE3-442_Dec15**

CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AE - SN: 442**

Calibration procedure(s) **QA CAL-06.v29
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **December 07, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	09-Sep-15 (No:17153)	Sep-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit Calibrator Box V2.1	SE UWS 053 AA 1001	06-Jan-15 (in house check)	In house check: Jan-16
	SE UMS 006 AA 1002	06-Jan-15 (in house check)	In house check: Jan-16

Calibrated by:

Name	Function	Signature
Dominique Steffen	Technician	

Approved by:

Name	Function	Signature
Fin Bomholt	Deputy Technical Manager	

Issued: December 7, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE3-442_Dec15

Page 1 of 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.405 \pm 0.02% (k=2)	405.045 \pm 0.02% (k=2)	405.266 \pm 0.02% (k=2)
Low Range	3.98819 \pm 1.50% (k=2)	3.98159 \pm 1.50% (k=2)	3.99102 \pm 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	108.0 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------



Accreditation No. 1292

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200038.67	1.67	0.00
Channel X + Input	20004.63	-0.23	-0.00
Channel X - Input	-20002.69	2.89	-0.01
Channel Y + Input	200037.29	0.28	0.00
Channel Y + Input	20002.85	-1.92	-0.01
Channel Y - Input	-20003.71	1.95	-0.01
Channel Z + Input	200037.94	1.15	0.00
Channel Z + Input	20004.04	-0.80	-0.00
Channel Z - Input	-20005.37	0.28	-0.00

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2001.81	0.64	0.03
Channel X + Input	201.21	0.18	0.09
Channel X - Input	-198.79	0.14	-0.07
Channel Y + Input	2000.92	-0.05	-0.00
Channel Y + Input	200.36	-0.57	-0.28
Channel Y - Input	-199.07	-0.02	0.01
Channel Z + Input	2001.64	0.66	0.03
Channel Z + Input	199.61	-1.30	-0.65
Channel Z - Input	-201.18	-2.14	1.08

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-8.87	-10.24
	- 200	12.75	10.95
Channel Y	200	0.20	0.18
	- 200	-1.34	-1.61
Channel Z	200	-5.09	-5.43
	- 200	3.49	3.23

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-0.29	-4.08
Channel Y	200	9.19	-	0.16
Channel Z	200	6.35	6.29	-



4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15808	17128
Channel Y	15771	16023
Channel Z	15577	15276

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.15	-1.33	2.08	0.67
Channel Y	-0.50	-2.34	1.49	0.59
Channel Z	-0.96	-3.35	1.51	0.80

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

