

Client _____ Quantity _____
 Project _____ Position _____

Pizza EN60x40 counter 1 door with drawers

Model: TZ09/1MC-710

Cod: T40603000261



Technical data

Top:	With top and splashback
Gross capacity:	171 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-In
Energetic class:	B
Energy efficiency index:	30,2
Annual consumption:	639 kW/h annum
24h consumption:	1,751 kW/h/24h
Climate class:	5
Cooling gas:	R290
Defrost:	Hot gas
Body height:	710 mm
Valve:	Supplied standard with solenoid
Dimensions:	1450×800×1040 mm
Packing dimensions:	1545×900×1080 mm
Gross weight:	210 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	250 W
Absorbed Current:	1,15 A
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	4 slides EN60x40
Control:	Electronic, display flush with the panel
Doors:	1 door, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	Stainless steel AISI 304, adjustable h 100-150 mm
Cosmo:	Ready for connection to Cosmo Hub

Accessories and variants



- Drawers 1/3
- Drawers 1/3 + 2/3
- Lock with key for drawer 1/2
- Lock with key for drawer 1/3
- Lock with key for drawer 1/3 + 2/3
- Plug-in water unit
- Power supply frequency 60Hz
- Other special voltage
- Adjustable height of feet: 145/195 mm
- 4 Swivel and brake castors h 128 mm
- Frame fitted with telescopic EN60x40 slides
- EN60x40 Pizza container h 60 mm
- Aluminium coated backing-pan EN60x40 h 20 mm
- Pair of type L slides 605 mm
- Serial interface, RS485 cable
- Cosmo connection kit
- IP44 schuko socket with cover

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Pizza counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

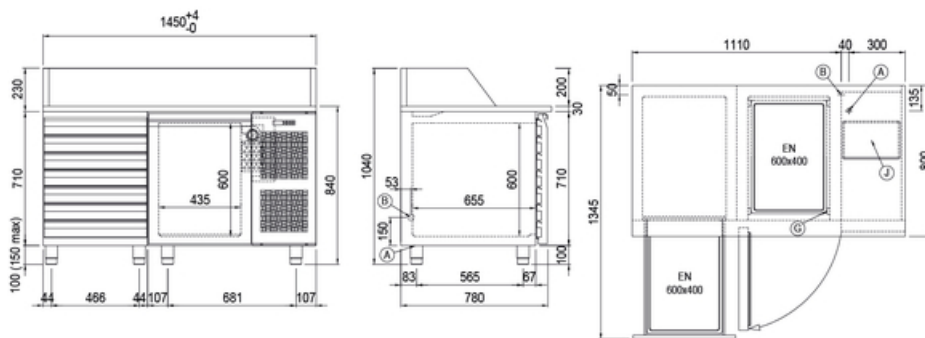

- A:** Power supply cable outlet
- B:** Condensation water drain
- G:** Racks pitch
- J:** Automatic evaporation of condensing water